

DC-A11 for DC120

The First *WIRELESS* Document Camera!

Lumens[™]
Brighter Teaching

Teachers can now present lessons from anywhere in the room while displaying on the screen or Interactive Whiteboard.

Key Features:

- **No Wires!**
- **Only for your Hi-Definition DC120 Document Camera**
- **High-Definition Image Clarity**
- **Excellent Color Reproduction Quality**
- **Built-in Microphone (via USB only)**
- **Flexible Gooseneck Design**
- **Simply attach the DC-A11 accessory to any DC120 Document Camera**
- **5-year Warranty**



DC-A11 - Battery-operated base



www.MyLumens.com
www.lumenseu.com

Specifications

DC-A11

WIRELESS

Wireless Standard : IEEE 802.11 n
Wireless Working Frequency : 2.4 GHz ISM radio band
Frame Rate : 20 fps (Maximum)
Transmission distance : 30m (95 feet)
Application : Ladibug™ (XP, Vista, Win7)

BATTERY

Battery work with DC120 : 6 hrs
Charging time : 3 hrs
Power Consumption : 24W (Maximum)
Battery replacement warranty : 1 year

ACCESSORY

Accessory : Dongle, Power Cord, Power Adapter, USB connector, Quick Start Guide, CD
Others : Collocating Product : DC120


OTHER

Temperature range : Centigrade : 5°C~35°C, Fahrenheit : 41°F~95°F
Weight : 535g (1.2 lbs)
Dimension : 182 x 141 x 49 mm (7.2" x 5.6" x 1.9") (L x W x H)
Dimension with Antenna : 182 x 141 x 93 mm (7.2" x 5.6" x 3.7") (L x W x H)

COMPLIANCE

Lumens™ visual presenters are compliant with these important standards: of FCC-EMI, SAR, CE-EMC, CE-LVD, CE-R&TTE, UL, RoHS, WEEE, ErP.

I/O CONNECTIONS

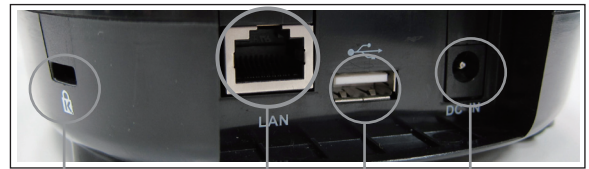

Kensington Lock Port Ethernet LAN USB 2.0 DC IN

Specifications

DC120

IMAGING

Sensor Technology : CMOS
Output Resolution : XGA (1024 x 768), SXGA (1280x960), UXGA (1600x1200)
Frame Rate : 30 fps (Maximum)
Zoom Capacity : 1x optical, 6x mechanical and 4x digital (only Lumens software)
Capture Area : 420 x 315 mm (17" x 12")

LIGHTING

Lamp Type : Built-in LED light

OUTPUT

USB Support : USB 2.0 High Speed (up to 480 Mbps) for independent use or seamless integration with interactive whiteboards

SOFTWARE

Ladibug™ Software Included : Support PC Windows 7, XP, Vista and Mac OSX.
Video Recording with Audio: Record video with various compression codecs.
Image Capture : Single or continuous capture of JPEG images
Annotation: Add annotations directly to live image

DRIVER

USB Driver : Support TWAIN, UAC/UVC for integration with interactive whiteboards including Promethean™, SMART™, Hitachi Starboard™, Mimio™, and others.

SECURITY

Anti-Theft : Kensington lock port
Bolt Holes on Bottom for Mounting : VESA standard 75 x 75 mm (2.95" x 2.95")

ACCESSORIES

Standard : 3m (10 foot) USB cable plus 5m (15 foot) USB extension cable – totals 8m (25 feet)
USB 2.0 High Speed Extension : No power cable required.
Optional Accessory: Microscope adapter - 28mm(1.1")(x1), padded carrying case

OPERATION FUNCTIONS

Auto Exposure : Yes
Auto White Balance : Yes
Auto Focus : Yes
Auto Tune : Yes
Photo/Text Mode : Choose photo/text mode
Image Capture : Capture images to the computer via USB connection
Audio/Video Recording : Yes, via USB by using Ladibug™ software
Built-in Microphone : Built into camera head for USB use
Image Rotation : Full screen image rotation from 0 to 180 degrees
Annotation : Yes, by using Ladibug™ software
USB Support Output Modes : VGA(640X480), SVGA(800X600), XGA (1024 x 768), SXGA (1280x960), UXGA (1600x1200), WXGA (1280x800)


OTHER

Weight : 1 kg (2.2 lbs)
Dimensions : 435 x 106 x 310 mm (17.1" x 4.2" x 12.2") (L x W x H)
Warranty : 5-year warranty

COMPLIANCE

Lumens™ visual presenters are compliant with these important standards: of FCC-EMI, cUL, CE-EMC, CE-LVD, RoHS, and WEEE.

I/O CONNECTIONS

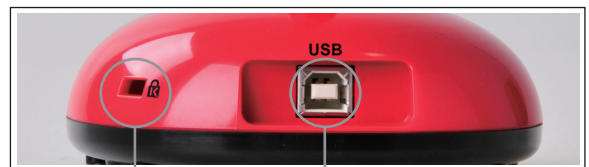

Kensington Lock Port USB 2.0

Lumens™
Brighter Teaching

Lumens Integration, Inc.
4116 Clipper Court
Fremont, CA. 94538
Phone : 866-600-0988
F a x : (510) 252-1389
http://www.MyLumens.com

Lumens Europe BVBA
Assesteenweg 65.
1740 Ternat, Belgium
Phone : +32 (0)2 462 61 50
F a x : +32 (0)2 462 61 53
http://www.lumenseu.com