
Panasonic

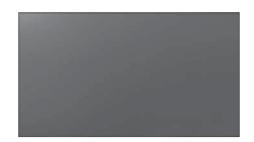

55-inch Super Narrow Bezel LED LCD Display

TH-55LFV5W

Product specification (design and specification subject to change without notice)

DISPLAY PANEL						
Screen Size (Diagonal)	55-inch (1,387.8 mm)					
Panel type	D-LED					
Aspect ratio	16:9					
Effective Display Area (W x H)	1,209.6 x 680.4 mm					
Number of pixels (H x V)	1920 x 1080 pixels					
Brightness	500 cd/m (Typ)					
Contrast Ratio	1400:1					
Response Time	10 ms (G to G)					
Viewing Angle (Horizontal/Vertical)	178° /178°					
Panel Life Time	approx. 60,000 hours*					
Panel Surface treatment	Anti-glare treatment (Haze 10%)					
*An approximate time until the panel bri	ghtness decreases to half of its original value.					
CONNECTION TERMINAL						
VIDEO IN	BNC x 1	1.0 Vp-p (75Ω)				
AUDIO IN (L/R)	RCA pin jack x 1 set (Side) (Shared with Comp	onent IN) 0.5 Vrms				
HDMI IN	HDMI TYPE A x 1	101/ (750)				
Component IN	BNC x 3	Y : 1.0 Vp-p (75Ω)				
		P _B : 0.7 Vp-p (75Ω)				
AUDIO IN (L/R)	RCA pin jack x 1 set (Side) (Shared with VID	P _R : <u>0.7 Vp-p (75Ω)</u> EO IN)				
DVI-D IN	DVI-D 24 Pin x 1	•				
AUDIO IN (L/R)	M3 jack x 1 (Shared with PC IN)	 0.5 Vrms				
PC IN	Mini D-sub 15pin x1 (Female)					
I C IIV	iviiii D-sub 13pii1X1 (reffidie)	$R/G/B$: 0.7 Vp-p (75 Ω)				
		H/CS/V : TTL $(2.2k\Omega)$				
AUDIO IN (L/R)	M3 jack x 1 (Shared with DVI-D IN)	SOG : 1.0 Vp-p (75Ω)				
DVI-I OUT	DVI-I 29pin x 1	0.5 Vrms				
AUDIO OUT (L/R)	RCA pin jack x 1 set					
CONTROL						
CONTROL						
SERIAL IN/OUT	D-sub 9pin x 1/D-sub 9pin x 1, RS-232C CO	MPATIBLE				
	RJ45 x 1 (Web browser control only)					
LAN						
IR TRANSMITTER IN/OUT	IR x 1 / x 1					
IR TRANSMITTER IN/OUT						
IR TRANSMITTER IN/OUT AUDIO	IR x1/x1	100//901				
IR TRANSMITTER IN/OUT		10W/8Ω]				
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω +					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V A					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω +					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V A					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V According to the second sec					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D)	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D)	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width	IR x 1 / x 1 External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom)					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen)					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen)					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount ENVIRONMENTAL	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black 400 x 400 mm					
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black 400 x 400 mm	AC, 60Hz (for Taiwan only)				
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount ENVIRONMENTAL Operating environment	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black 400 x 400 mm Temperature : 0°C to 40°C Humidity : 10% to 90% (Non con	AC, 60Hz (for Taiwan only)				
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount ENVIRONMENTAL	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black 400 x 400 mm Temperature : 0°C to 40°C Humidity : 10% to 90% (Non con Temperature : -20°C to 60°C	AC, 60Hz (for Taiwan only) densation)				
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount ENVIRONMENTAL Operating environment	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black 400 x 400 mm Temperature : 0°C to 40°C Humidity : 10% to 90% (Non con	AC, 60Hz (for Taiwan only) densation)				
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount ENVIRONMENTAL Operating environment	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black 400 x 400 mm Temperature : 0°C to 40°C Humidity : 10% to 90% (Non con Temperature : -20°C to 60°C	AC, 60Hz (for Taiwan only) densation)				
IR TRANSMITTER IN/OUT AUDIO Speaker OUT ELECTRICAL Power Requirements Power Consumption Stand-by condition MECHANICAL Dimensions (W x H x D) Carton Dimensions (W x H x D) Weight Gross weight Bezel Width Bezel to Bezel Cabinet Material / Color VESA mount ENVIRONMENTAL Operating environment	External Speker Terminal, 20W [10W/8Ω + 220 - 240 V AC, 50/60 Hz. TAIWAN: 110V / 220 W approx. 0.5 W 1,215.5 x 686.3 x 121.2 mm 1,551 x 979 x 450 mm approx. 36.0 kg approx. 52.0 kg 3.4 mm(left/top), 1.9 mm(right/bottom) 5.3 mm(Multi screen) Metal / Black 400 x 400 mm Temperature : 0°C to 40°C Humidity : 10% to 90% (Non con Temperature : -20°C to 60°C	AC, 60Hz (for Taiwan only) densation)				

■INCLUDED ACCESSORIES

- AC power cord - Operating instruction book - DVI Cable - Wire clampers - Connector cable of remote control - CD-ROM (Operation instruction)


MAIN FEATURE

Multi Screen	Yes (N x M, up to 5 x 5)
Daisy Chain	Yes (DVI MAX 10 units)*1
Remote Daisy Chain	Yes (MAX 25 units)
Serial Control Daisy Chain	Yes (MAX 25 units)
1:1 Pixel mode	Yes
Automatic Picture Position	Yes
Screen Saver	Yes
PC/DVI Power Management	Yes
Remote Operation lock	Yes
Orientation Landscape / Portrait	Yes
Power-on Screen Delay	Yes
Seam Hides Video Off Mode	Yes
Heat Status	Yes
Operating Time*2	24h/7d
Setting User Memory Function	Yes
Color Calibration	Done


OPTIONAL ACCESSORIES

Remote Control Kit	TY-RM50VW
Cover Frame Kit	TY-CF55VW50

O DIMENSIONS Cautions: This drawing is not a scale

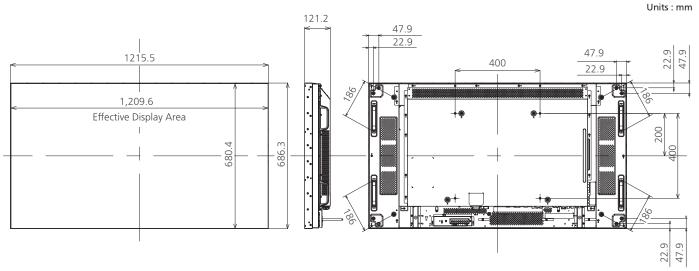

OCUPY CONNECTION TERMINAL

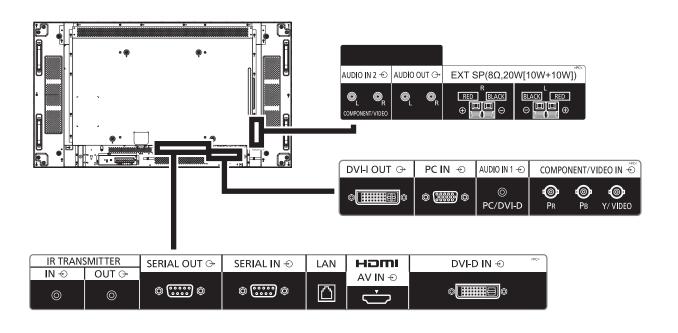

^{*1:} HDCP can be supported for up to 8 displays.
*2: In case of running for a long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.

INPUT MODE

PC Resolution:

Standard	Active R	esolution	Refresh Rate Dot Clock		Aspect Potio	Stand for Mode
Resolution	H Pixels	V Lines	Refresh Rate Dot Clock	Aspect Ratio		
		480	60 Hz	25.175 MHz		Video Creshie
VGA	640	480	72 Hz	31.5 MHz	4:3	Video Graphic
		480	75 Hz	31.5 MHz		Array
WVGA	720	400	70 Hz	33.75 MHz	16:9	Wide Video Graphic Array
SVGA	SVGA 800	600	60 Hz	40 MHz	4:3	Super VGA
SVGA	800	600	75 Hz	49.5 MHz		
XGA	1024	768	60 Hz	65 MHz	4.0	Extended
AGA	1024	768	75 Hz	78.75 MHz	4:3	Graphic Array
WXGA	1280	768	60 Hz	79.5 MHz	5:3	Wide XGA
WXGA	1280	800	60 Hz	79.5 MHz	16:10	Wide XGA
SXGA	1280	960	60 Hz	108 MHz	4:3	Super XGA
SXGA	1280	1024	60 Hz	108 MHz	5:4	Super XGA
WXGA	1360	768	60 Hz	85.5 MHz	16:9	Wide XGA
WXGA	1366	768	60 Hz	85.5 MHz	16:9	Wide XGA
UXGA	1600	1200	60 Hz	162 MHz	4:3	Ultra XGA
HD1080	1920	1080	60 Hz	148.5 MHz	16:9	HD1080

SDTV Resolution:

Standard	Active R	esolution	Refresh Rate	Dot Clock	Aspect Ratio	Stand for Mode	
Resolution	H Pixels	V Lines	Nellesii Nale	DOI CIOCK	Aspect Natio	Starid for Mode	
480i	720	480	29.97 Hz	13.5 MHz	4:3	Modified NTSC	
480p			59.94 Hz	27 MHz		Standard	
576i	720	576i 720 480	490	25 Hz	13.5 MHz	4.2	Modified PAL
576p		400	50 Hz	27 MHz	4:3	Standard	

HDTV Resolution:

Standard	Active R	Active Resolution		Det Cleek	Assast Datis	Ctand for Mada
Resolution	H Pixels	V Lines	Refresh Rate	Dot Clock	Aspect Ratio	Stand for Mode
720n	720p 1280	720	50 Hz	74.25 MHz	16:9	Normally DVB
720p			60 Hz			Mode
1080i 1920	1080	25 Hz	74.25 MHz	16:9	Normally ATSC	
		30 Hz			Mode	
1080p 1920	1020	1920 1080	50 Hz	148.5 MHz	16:9	Normally ATSC
	1000	60 Hz	140.5 IVITZ	10.9	Mode	

- The PC text quality is optimum in HD 1080 mode (1920 x 1080, 60 Hz).
- Your PC display screen might appear different depending on the manufacture (and your particular version of Windows).
- Check your PC instruction book for information about connecting your PC to a monitor.
- If a vertical and horizontal frequency-select mode exists, select 60 Hz (vertical) and 31.5 KHz (horizontal). In some cases, abnormal signals (such as stripes) might appear on the screen when the PC power is turned off (or if the PC is disconnected). If so, press the [INPUT] button to enter the video mode. Also, make sure that the PC is connected.
- When horizontal synchronous signals seem irregular in RGB mode, check PC power saving mode or cable connections.
- The display settings table complies to the IBM/VESA standards, and based on the analog input.
- The DVI support mode is regarded as same to the PC support mode.
- The best timing for the vertical frequency to each mode is 60 Hz.