

SHARP®

PN-V601
ULTRA-SLIM BEZEL LCD MONITOR

World's Slimmest Bezel 60" LCD Monitor* For Virtually Seamless Multi-Screen Video Wall Displays



With the slimmest bezel in the 60" diagonal class*, the PN-V601 is the new standard for multi-screen video wall displays. Portrait and landscape compatibility, full array LED backlighting and virtually seamless borders help you create high impact video walls in almost any size and format.

* Based on published information as of June 8, 2010 for LCD panels of 46-inches or larger in size.



Best Digital Signage
Product – Displays



Most Innovative Video
Display Product






Sharp Ultra-Slim Bezel LCD Monitor Opens New Display Opportunities

The PN-V601 is the ideal choice for exciting, virtually seamless multi-screen video wall configurations. With its professional design, high image quality and 24/7 certified reliability, the PN-V601 brings almost limitless digital signage and display possibilities to shopping malls, airports, museums, stadiums, control centers and more.

● Enlarge (Zoom) Display Mode (for up to 25 Monitors)

The Enlarge (Zoom) Display mode can spread one image across up to 25 monitors (in a 5 x 5 configuration) from a PC. The Frame Width Adjustment function virtually eliminates misalignment and boldly enhances the enlarged image on a multi-screen display.

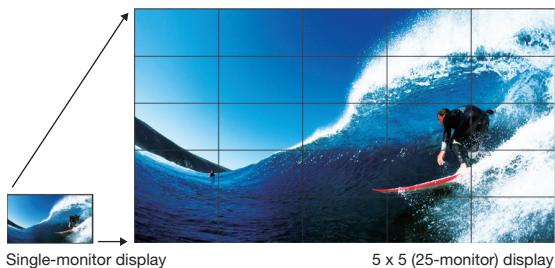

● Full-Array LED Backlight

To give the PN-V601 more uniform brightness than conventional CCFL* backlighting can offer, Sharp has positioned LED elements across the entire panel directly behind the liquid crystal layers, ensuring that Sharp multi-screen displays are bright, beautiful and uniform.



(Image)

* Cold Cathode Fluorescent Lamp

● PN-ZR01 Control Kit (sold separately)

When one of the monitors in a multi-screen configuration is fitted with a remote control sensor box, all of the monitors can be conveniently operated through one remote control unit. And to help with overall energy savings, a brightness sensor automatically adjusts the brightness of the backlight to match the ambient lighting. (UPC: 074000069022)




Remote controller

Remote control sensor box



Almost Limitless Display Possibilities


Thanks to the PN-V601's ultra-slim bezel, the borders between neighboring monitors are a virtually seamless 6.5 mm¹ wide (2.4 mm on the right and bottom; 4.1 mm on the left and top).² When used in a video wall configuration, this enables the display of crisp and high impact images of almost any size and format. And, with 24/7 certified reliability, 3-year onsite parts and labor limited warranty and ENERGY STAR® qualified, the PN-V601 is designed to be both exceptionally reliable and environmentally friendly.



*1: Does not include the gap between the monitors. *2: Non-display area for neighboring monitors is 7.1 mm.

Create Dynamic Video Walls

Units: cm (measurements are approximations that include the bezel width)

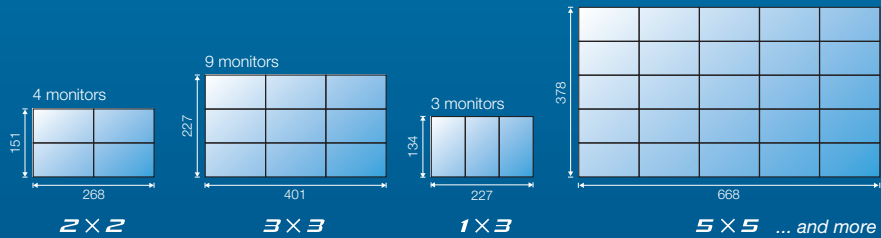

Almost any number of PN-V601 monitors may be joined together to create high impact multi-screen video walls. These configurations may be controlled through RS-232C or over a network.* Their ease of control and ease of integration help simplify the design and installation of sophisticated video wall displays of most any size and shape.


* PN-ZB02 input/output expansion board is required for network control.

Sharp Digital Signage Software

Sharp Digital Signage Software® is a versatile management software package that provides total support for the creation, scheduling, distribution, and display of a wide range of programs for Sharp LCD monitors installed in offices, commercial establishments, and public spaces.

- To facilitate program editing, four frames for such diverse content as still images, video, HTML, and Flash® can be freely arranged, and two message bars—with multi-language support and a variety of fonts and backgrounds to choose from—can be displayed horizontally or vertically.
- To ensure easy setup of content schedules, Sharp Digital Signage Software features a user-friendly interface.
- To smoothly manage program display, power and input can be remotely controlled, and displays can be remotely monitored.

Programme editing screen

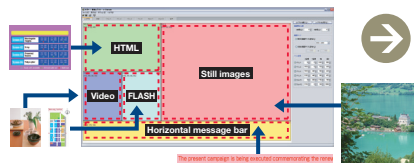


Display screen



For Use in Stand-Alone or Network Systems

PN-SS02 Network Version

In network systems, PN-SS02 software enables programs to be edited and stored on a networked PC then distributed via the network to up to 100 clients* according to a set schedule.

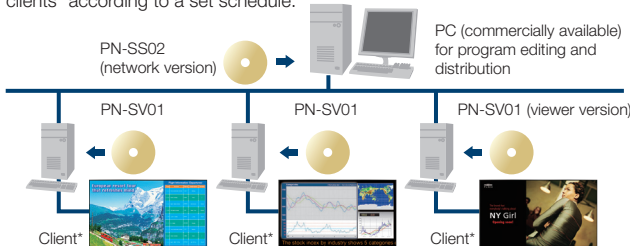

PN-SV01 Viewer Version


Used on the client* side, PN-SV01 viewer software allows programs edited with PN-SS01 or PN-SS02 software to be displayed on the client's LCD monitor according to a set schedule.

Sharp Digital Signage Software Configuration

Version name	Number of software installations required
PN-SS02 network version	1
PN-SV01 viewer version	Same as the number of clients*


<Multiple Display Management> NEW

Sharp Digital Signage System (ver. 3.0) is able to retrieve status updates from multiple displays via a single PC, simplifying the task of managing large configurations.

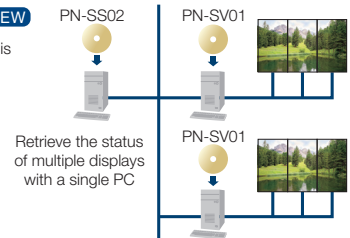

<Synchronized Display> NEW

SDSS is able to synchronize the clocks on each viewer PC with the management PC at regular intervals, making it possible to start programs on multiple displays at the exact same time.

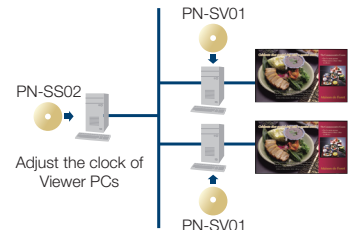

PN-SS01 Stand-Alone Version

In stand-alone systems, PN-SS01 software enables programs to be edited on a single PC for display on a single LCD monitor according to a set schedule. Programs can be transferred to another client* via a USB flash drive.

*Each client represents a separate PC and Sharp LCD monitor.

Specifications

Model Name		PN-V601	Input Terminals		Standard	PC analog: Mini D-sub 15-pin x 1, HDMI® x 1, 3.5 mm-diameter mini stereo jack x 1, RS-232C D-sub 9-pin x 1, Control Kit terminal x 1
Installation		Portrait / Landscape	Output Terminals		Via Optional PN-ZB02 Board	PC digital: DVI-D 24 pin x 1, PC analog: BNC x 1 Video: BNC x 1, S-Video x 1, Component video: BNC (Y, Cb/Pb, Cr/Pr) x 1, Audio: RCA pin (L/R) x 2
LCD Panel		60-inch widescreen (152.4 cm diagonal)	Input/Output Terminals		Via Optional PN-ZB02 Board	LAN port
	Max. Resolution	1,366 x 768 pixels	Power Supply/Power Consumption		100V – 240V AC, 50/60 Hz/480W	
	Max. Display Colors (approx.)	16.77 million colors	Mounting		VESA (6 points), 200mm (7 7/8") pitch VESA (4 points), 200mm (7 7/8") pitch	
	Pixel Pitch	0.97275 mm	Environmental Conditions		Operating Temperature	0°C to 40°C
	Max. Brightness*	700 cd/m ²			Operating Humidity	20% to 80% RH (no condensation)
	Contrast Ratio	2400:1	Dimensions (W x D x H) (approx.)		1,335.9 x 149.3 x 754.2 mm (52 5/8" x 5 7/8" x 29 3/4") (Display section only, not including protrusions)	
	Viewing Angle (H/V)	176°/176° (CR ≥ 10)	Packing Dimensions (W x D x H) (approx.)		1,580 x 381 x 932 mm (62 1/4" x 15" x 36 3/4")	
	Active Screen Area (W x H)	1328.8 x 747.1 mm	Weight (not including PN-ZB02) (approx.)		44 kg (96.9 lbs.)	
	Response Time	6 ms (gray to gray, avg.)	Packing Weight (approx.)		55 kg (121.25 lbs.)	
Computer Input		Video	Main Accessories		AC power code (approx. 3m.) operation manual, CD-ROM, stand hole protection cover	
		Analog RGB (0.7 Vp-p) [75 Ω], Digital (conforms to DVI 1.0 standards)	UPC		074000047068	
	Synchronization	Horizontal/vertical separation (TTL: positive/negative) Sync-on-green, Composite sync (TTL: positive/negative)				
	Plug & Play	VESA DDC2B				
	Power Management	VESA DPMS, DVI DMPM				
Video Color System		NTSC (3.58 [NTSC-M]) / NTSC (4.43) / PAL / PAL60 / SECAM				

* Brightness will depend on input mode and other picture settings. Brightness level will decrease over time. Due to the nature of the source equipment, it is not possible to precisely maintain a constant level of brightness.

Sharp Digital Signage Software Operating Environment

Personal Computer	CPU-Celeron® M1.3GHz or faster (Pentium® 4 processor is recommended) A high-performance CPU, such as Pentium® 4 2GHz or faster, is required for programs that include a large volume of videos or other content*1
OS	Microsoft® Windows® XP, Microsoft® Windows Vista®, Microsoft® Windows 7, Microsoft® Windows Server® 2003/2008 (English version)
Memory	256MB or more (512MB or more is recommended)*1
Hard Disk	20MB or more of free space (required for data)
Display (PC use)*2	Full-color display with a resolution of 1,024 x 768 or higher
Interface	USB port (only for use with USB memory), LAN port (only network versions that enable TCP/IP communications)
Miscellaneous	Microsoft® Internet Explorer® 6.0 or later, Microsoft® PowerPoint® Viewer 2003/2007, Microsoft® Windows Media® Player 9 or later*3, Adobe® Flash® Player QuickTime Player 7 or later (for playback of QuickTime content)


Sharp Digital Signage Software Supported Files	
Background and Display Frames 1 to 4	MPEG, MPEG1, MPEG2, MPEG4, WMV (format for playing back on Windows Media® VIDEO - Windows Media® Player), MOV (format for playing back on QuickTime Player), Adobe® Flash® (format for playing back on Adobe® Flash® Player), PowerPoint®, HTML, JPEG, BMP, GIF, PNG
Audio	WAVE, MP3, AU, AIFF, WMA (format for playing back on Windows Media® Audio - Windows Media® Player), MIDI, MOV (format for playing back on QuickTime Player)

Depending on CPU speed, memory, and other factors, it may not be possible to use some video, subtitles, and other content.

*1 This operating environment must be available when using Microsoft® Windows Vista® or Microsoft® Windows 7.

*2 For creating and editing programs and schedules.


*3 A codec (sold separately) may be required to play back video files.

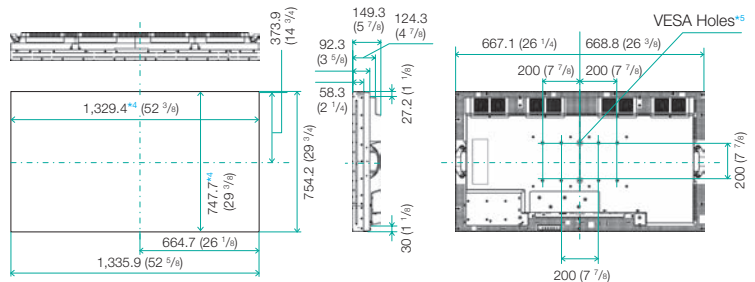

Units: mm (inch)

*4 Screen dimensions

*5 To use the VESA-standard mounting bracket, use M6 screws that are 8 to 10 mm plus the thickness of the bracket.

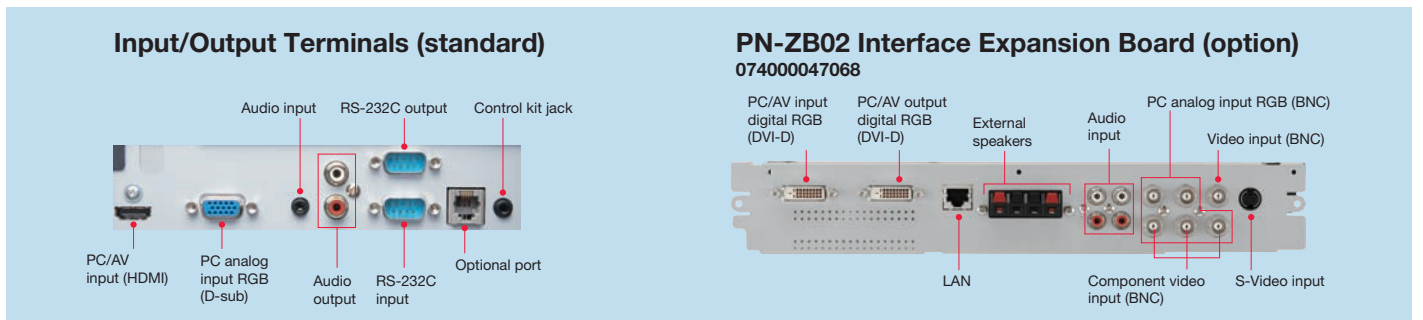

Design and specifications subject to change without prior notice.

Sharp, SDSS and related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated entities. Microsoft, Windows, Microsoft Windows Server 2003/2008, Windows XP, Windows Vista, Windows 7, Internet Explorer, PowerPoint and Windows Media are trademarks or registered trademarks of Microsoft in the United States and/or other countries. Pentium and Celeron are trademarks or registered trademarks of Intel Corporation in the U.S. and other countries. Adobe, Flash and Adobe Flash Player are trademarks or registered trademarks of Adobe Systems Inc. QuickTime is a trademark of Apple Computer Inc. HDMI is a registered trademark of HDMI Licensing LLC. ENERGY STAR is a registered mark of the U.S. Government. All other trademarks are the property of their respective owners.

SHARP ELECTRONICS CORPORATION
Professional Display Division
Sharp Plaza, Mahwah, NJ 07495-1163
For more information call 1-866-4-VISUAL (1-866-484-7825)
www.sharppusa.com/monitors

Distributed by:



© 2010 Sharp Electronics Corporation. All rights reserved. 10-11-10

LC-02-376