


Ultra Short Mobile Projector

Enable Space Saving Projection & Interactive Function,
Powerful Solution for Classroom and the Office

PLC-WL2503

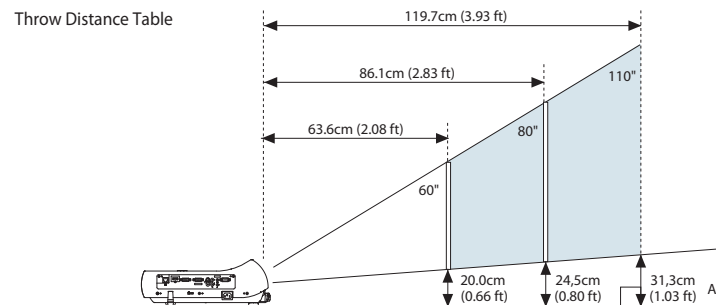

Throw Distance (Aspect ratio 16:10)			
Zoom/Focus		Fixed/manual	
Focal length f (mm/inch)		6.68 / 0.26	
F value		1.8	
Projection light axis		H1:H2	
		10:-1.68	
Throw ratio (Indication)		0.50:1	
inch	WxH(m)	Distance (cm / ft)	A: Height from the undersurface of the projector to the bottom of the screen (cm / ft)
60	1.3x0.8	63.6 / 2.08	20.0 / 0.66
70	1.5x0.9	74.8 / 2.45	22.3 / 0.73
80	1.7x1.1	86.1 / 2.83	24.5 / 0.80
90	1.9x1.2	97.3 / 3.19	26.8 / 0.88
100	2.2x1.3	108.5 / 3.56	29.1 / 0.96
110	2.4x1.5	119.7 / 3.93	31.3 / 1.03

* Approximate projection distance are calculated based on lens design specification. Individual lenses may diverge from this figure by up to 5% due to slight variations in lens size and shape.




Specifications	
Product Number	PLC-WL2503
System	RGB liquid crystal shutter projection system
LCD panel	Size: 0.59 inch x 3, Aspect Ratio 16:10
Projection Lens	Fixed / Manual focus, f=6.68 mm 0.26", F=1.8
Light Source	230 W NSHA lamp
Screen Size (Projection Distance)	60 inch (min.) - 110 inch (max.) 0.64 m - 1.20 m 2.1" - 3.9" 80 inch: 0.86 m
Brightness *1	2,500 lumens *2
Contrast Ratio (Full On / Full Off)*1	500:1*3
Fan Noise	29 dBA (Lamp mode "Eco")
Uniformity *1	80 %
Color Reproducibility	Full color (16.77 million colors)
Audio Output	10 W mono
scanning frequency (Input)	Horizontal: 15-100 kHz, Vertical: 50-100 Hz, Dot Clock: 140 MHz or less (Analog)
Resolution (when using RGB signal)	1280 x 800 dots (WXGA dot resizing possible)
PC Input / Output	-Digital input ; HDMI x 1 (Ver. 1.3 compatible) -Analog RGB input ; Mini D-sub 15 x 2 (can be used for component input with a component to D-sub cable, sold separately) -Analog RGB output ; Mini D-sub 15 x 1 (same as analog RGB input terminal) -Audio input ; Stereo mini jack x 1 (computer/component)
Terminals	-Video Input : Video input ; RCA x 1, S-Video x 1; Audio input ; RCA x 2 (stereo) -Controller Input / Output, and Other : Control port ; D-sub 9 (RS-232C) x 1 Audio output (variable) (for both computer/video) ; Stereo mini jack x 1 Wired LAN terminal ; RJ-45 x 1
Operating Temperature	5 - 35 °C
Power Source	AC 100 - 120 V / 200 - 240 V (±10 %), 50/60 Hz
Power consumption	100 - 120 V AC : 339.2 W / 227.4 W (Lamp mode : Normal / Eco) 5.94 W / 0.42 W (Standby : Network / Eco)
	200 - 240 V AC : 316.2 W / 217.3 W (Lamp mode : Normal / Eco) 7.9 W / 0.78 W (Standby : Network / Eco)
Dimensions (mm/inch)	350.0(w) x 129.4(h) x 381.9(d) 13.8"(w) x 5.1"(h) x 15.0"(d) (not including protruding parts)
Weight	4.7 kg (10.3 lbs)
Main Accessories	Removable power cord x 1, D-sub 15 cable x 1, PIN code-locking seal, Owner's manual (Quick Manual & CD-ROM), Remote control x 1, AAA battery 2 x 3, Interactive Pen, Interactive Pointer, USB Cable

Replacement Lamp Type No. 610 349 0847

*1 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards.
*2 When Lamp Mode: Normal is selected. *3 When Lamp Mode: Normal, and Image Mode: Dynamic are selected.
* All product names and company names are trademarks or registered trademarks of their respective companies.
* Product appearance and specifications are subject to change without notice.

External dimensions (unit: mm (inch))

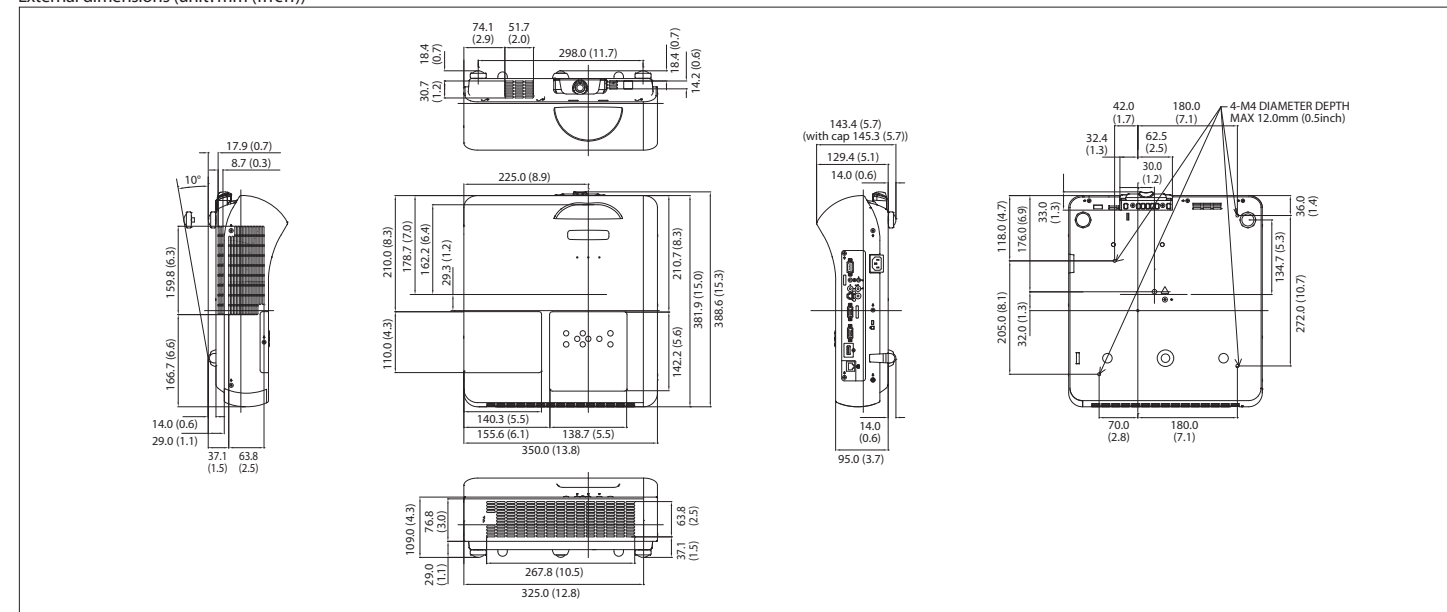

PLC-WL2503
WXGA 2500lm



SANYO Presentation Technologies
Toll free: 888-337-1215 www.sanyoprojectors.com

© 2011 SANYO North America Corporation.

WXGA
2500lm






A wide XGA ultra short-focus mobile projector offering interactive capabilities which enable effective presentation or class

Equipped with an ultra short-focus lens for space saving


A large 80-inch image can be projected from a distance of only 86 cm. The ultra short-focus lens enables projection of a large 80-inch image from a distance of only 86 cm. This permits enjoyable large-screen presentations to be given in a shorter focal distance. In an educational setting, an instructor can show a presentation on the blackboard by simply setting up the projector on an instructor's desk at the front of the classroom. In ceiling-mount situations, the projector can be installed closer to the screen to avoid light shining in the eyes of the presenter.

A Large 80" Image Can Be Projected at a Distance of Only 86 cm

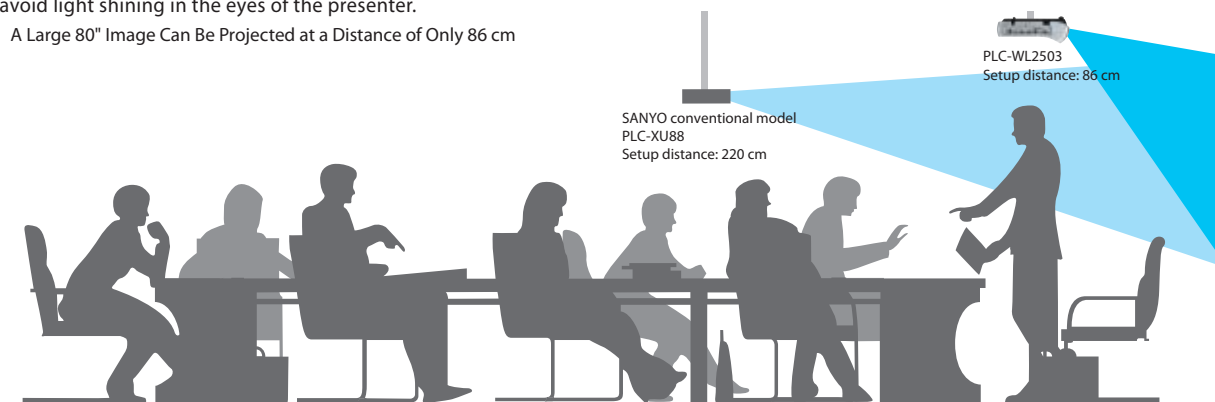


Previous model

- When standing in front of a projector, a presenter is dazzled by the light shining.
- A presenter blocks the light and the shadows on the screen disturb the projection.



PLC-WL2503

- A presenter is hardly dazzled even when standing in front of a projector.
- The shadows are hardly cast on the screen.

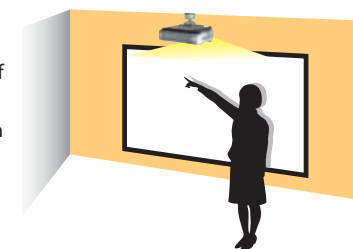


Interactive Function

The Interactive function makes it easy to move between guest rooms, conference rooms and meeting spaces for quick and easy use in a variety of locations. The Interactive function lets you write text, graphics or lines onto projected screen images. You can also save the revised images in JPEG format. A Mouse function also lets you operate the PC right from the screen. That means you can manipulate teaching materials and software that are on the PC, and use a variety of tools. You can give more effective, enjoyable lessons, and more persuasive presentations and meetings.

Operating environment

OS	Microsoft Windows XP(SP2)/ Vista/ Windows 7
Windows	CPU Core Duo or more
	Memory 512MB or more
	HDD 30MB
OS	Mac OS X v10.5-v10.6.4 or more (except v10.6.3)
Mac	CPU Intel Processor
	Memory 512MB or more
	HDD 10MB or more
	Media drive CD-ROM/ DVD-ROM or four X speed or more
	Other USB 1.1 or later

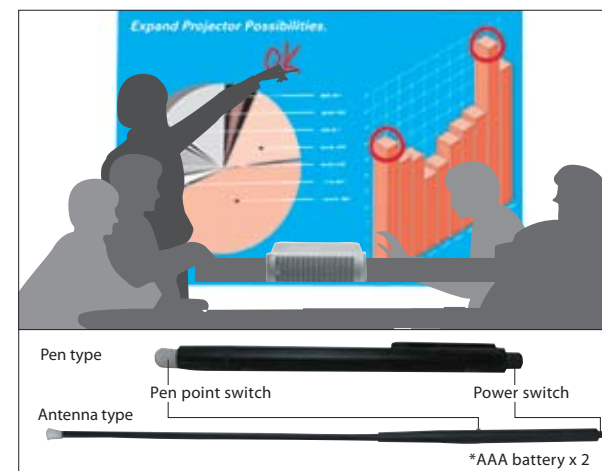


POA-PEN-001 (Interactive pen)
POA-PEN-002 (Interactive wand)

Easy Maintenance

Hybrid filter

Offering long periods of maintenance-free use, without the need for lamp replacement, and filter replacement only after approximately 4,000 hours- Equipped with SANYO's proprietary hybrid filter composed of multiple filter layers. The filter replacement cycle has been extended by a factor of 20 to approximately 4,000 hours^{*1} compared to our conventional model^{*2}.


^{*1} When in Eco mode. Calculated through the company's independent test in reference to the JIS D0207 test method. The filter replacement period is an estimate.
^{*2} SANYO conventional model: PLC-WXL46

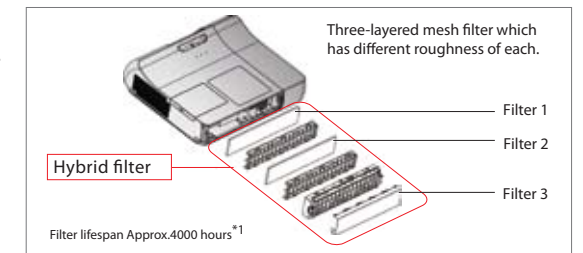

Long-life lamp

The lamp lifespan has been improved by about 30% compared to our conventional model^{*3}, and does not need to be replaced for approximately 4,000 hours^{*4}, thereby greatly reducing the inconvenience of product maintenance. The longer lamp lifespan, also makes it more eco-friendly, with a smaller impact on the environment.

^{*3} SANYO conventional model: PLC-WXL46
^{*4} When in Eco mode. The lamp replacement cycle is an estimate, not guaranteed. It is subject to change according to the use conditions.

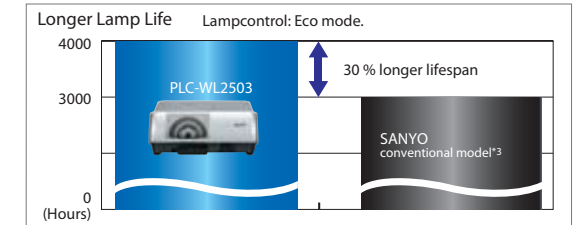

Easier Replacement

Lamp replacement has been simplified to make maintenance easier, Easy removal and replacement of the lamp from the top, Of course the lamp can also be replaced easily even if the projector is ceiling mounted.



Useful Features

16:10 wide-screen aspect ratio LCD panels

The adoption of a high-resolution Wide XGA panel enables projection of 16:10 aspect ratio Wide XGA (1280 x 800 dot) images. Compared to the 4:3 aspect ratio XGA (1024 x 768 dot) format, the size of the screen has been greatly expanded, enabling the display of even more information.

High sound output with a 10-watt speaker

As the first SANYO projector with a high-output 10-watt speaker that produces clearer sound even in large spaces such as conference rooms and classrooms, the PLC-WL2503 can be used for multimedia presentations without the need for any external speakers or extra equipment.

High-brightness projection of 2,500 lumens

Enough brightness and sound volume for high-impact presentations even in larger conference rooms and classrooms. With its 230-watt high-output lamp and newly developed optical engine, the PLC-WL2503 offers high-brightness projection of 2,500 lumens.

HDMI Terminal

The PLC-WL2503 comes equipped with an HDMI (High Definition Multimedia Interface) terminal. It is possible to project beautiful images.

A Wired LAN Network Control function* is included as standard equipment

A centralized management and control system can be easily configured. ^{*}This function comes as standard equipment.

Direct Power-off Function

The projector can be turned off by unplugging the cable without pressing the power button.

Silence Design (29 dB, in Eco mode)

The operating noise is hardly noticeable even in quiet settings like conference or AV rooms.



PLC-WL2503 | WXGA | 2500lm |