

Panasonic

Professional Display

Lineup Catalog Early 2014

Panasonic®

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. Windows, Windows Vista and PowerPoint are trademarks of Microsoft Corporation in the United States and other countries. Android is a registered trademark or trademark of Google Inc. Macintosh, Mac, Mac OS X, iPad, iPhone, iPod touch and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. The P.JLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Crestron Connected™ is a trademark of Crestron Electronics, Inc. Miracast™ are trademarks or registered trademarks of Wi-Fi Alliance. HDBaseT™ is a trademark of the HDBaseT Alliance. All other trademarks are the property of their respective trademark owners. Images on screen are simulated. © 2014 Panasonic Corporation. All rights reserved.



For more information about Panasonic Professional Display, please visit:
Professional Display Global Website: panasonic.net/prodisplays
YouTube: www.youtube.com/PanasonicProDisplay

All information included here is valid as of February 2014.

CT14—EG01PF
Printed in Japan.



Panasonic Professional Displays Lineup

Indoor



- High Brightness
- 24/7 Use Reliability
- System Expandability

LF50 Series

700 cdm

80" TH-80LF50

70" TH-70LF50

NEW **NEW** **NEW**

LF60 Series

700 cdm

55" TH-55LF60

47" TH-47LF60

42" H-42LF60

NEW **NEW** **NEW**

LF6 Series

450 cdm

55" TH-55LF6

47" TH-47LF6

42" TH-42LF6

NEW **NEW** **NEW**



Multi Touch Screen



- Quick & Easy to use
- Wireless Option for Mobile & PC
- Better Connectivity & Flexibility

LFB70 Series

350 cdm

80" TH-80LFB70

65" TH-65LFB70

50" TH-50LFB70

NEW **NEW** **NEW**



Video Wall



- Super Narrow Bezel
- 24/7 Use Reliability
- Easy Installation & Connection

LFV50 Series

800 cdm

55" TH-55LFV50

LFV5 Series

500 cdm

55" TH-55LFV5

47" TH-47LFV5

NEW



Network



- Wireless Option for Mobile & PC
- Better Connectivity & Flexibility
- Superior Imaging Quality

LFC70 Series

350 cdm

80" TH-80LFC70

65" TH-65LFC70

50" TH-50LFC70

NEW **NEW** **NEW**



Outdoor



- High Visibility Under Sunlight
- Durability Against Rain/Dust
- System Expandability

LFX60 Series

2000 cdm

47" TH-47LFX60

NEW

LFX6 Series

1000 cdm

47" TH-47LFX6



Standard



- Slim & Stylish Design
- High Picture Quality & Ecology
- LAN & RS232C Control Capability

LFE7 Series

350 cdm

65" TH-65LFE7

NEW

LFE6 Series

350 cdm

50" TH-50LFE6

42" TH-42LFE6





Model no.	TH-80LF50	TH-70LF50	TH-55LF60	TH-47LF60	TH-42LF60
DISPLAY					
Screen Size (Diagonal)/Aspect Ratio	80-inch (2,032 mm)/16:9	70-inch (1,765 mm)/16:9	55-inch (1,387 mm)/16:9	47-inch (1,192 mm)/16:9	42-inch (1,067 mm)/16:9
Panel Type	VA Panel/E-LED	VA Panel/E-LED	IPS/E-LED	IPS/E-LED	IPS/E-LED
Effective Display Area (W x H)	1,771 x 996 mm	1,538 x 865 mm	1,209 x 680 mm	1,039x 584 mm	930 x 523 mm
Number of Pixels (H x V)	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels
Brightness	700 cd/m ² (Typ)	700 cd/m ² (Typ)	700 cd/m ² (Typ)	700 cd/m ² (Typ)	700 cd/m ² (Typ)
Contrast Ratio	5,000:1	5,000:1	1,300:1	1,300:1	1,300:1
Response Time	9 ms (G to G)	9 ms (G to G)	12 ms (G to G)	12 ms (G to G)	12 ms (G to G)
Viewing Angle	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
TERMINAL					
VIDEO In	BNC x 1		BNC x 1		
Audio In (L/R)	Pin Jack x 1 set		Pin Jack x 1 set		
HDMI In	HDMI Type A Connector x 1		HDMI Type A Connector x 2		
Component/RGB In	BNC x 1 set		BNC x 1 set		
Audio In (L/R)	Pin Jack x 1 set		Pin Jack x 1 set		
DVI-D In	DVI-D 24-pin x 1		DVI-D 24-pin x 1		
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)		Stereo Mini Jack (M3) x 1 (Shared with PC In)		
DVI-D Out	DVI-D 24-pin x 1		DVI-D 24-pin x 1		
PC In	Mini D-Sub 15-pin x1 (Female)		Mini D-Sub 15-pin x 1 (Female)		
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)		Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)		
Audio Out (L/R)	Pin Jack x 1 set		Stereo Mini Jack (M3) x 1		
Serial In/Out	D-Sub 9-pin x 1/D-Sub 9-pin x 1, RS-232C Compatible		D-Sub 9-pin x 1/D-Sub 9-pin x 1, RS-232C Compatible		
DIGITAL LINK	—		RJ45 x 1 (Shared with LAN)		
LAN	RJ45 10BASE-T/100BASE-TX, Compatible with PLink™		RJ45 100BASE-TX, Compatible with PLink™ (Shared with DIGITAL LINK)		
IR In/Out	—		IR x 1/x 1		
Function Slot	SLOT2.0 x 1		—		
GENERAL					
Power Requirements	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz
Power Consumption	Approx. 380 W	Approx. 260 W	Approx. 150 W	Approx. 140 W	Approx. 125 W
Power Off Condition	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
Dimensions (W x H x D)	1,848 x 1,073 x 89 mm	1,604 x 931 x 89 mm	1,248 x 718 x 68 mm	1,076 x 621 x 68 mm	967 x 560 x 68 mm
Carton Size (W x H x D)	1,993 x 1,188 x 349 mm	1,750 x 1,047 x 349 mm	1,411 x 940 x 204 mm	1,210 x 826 x 204 mm	1,113 x 705 x 222 mm
Bezel Width	36 mm	30 mm	16 mm	16 mm	16 mm
Weight	Approx. 60.0 kg	Approx. 47.0 kg	Approx. 25.8 kg	Approx. 16.7 kg	Approx. 14.5 kg
Gross Weight	Approx. 71.0 kg	Approx. 56.0 kg	Approx. 31.5 kg	Approx. 21.8 kg	Approx. 18.5 kg
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm
Built-in Speakers	—		10 W [5W + 5 W]		10 W [5W + 5 W]
Operating Environment	Temperature: 0 °C to 40 °C / Humidity: 20 % to 80 % (Non Condensation)		Temperature: 0 °C to 40 °C / Humidity: 20 % to 80 % (Non Condensation)		
Storage Environment	Temperature: -20 °C to 60 °C*1 / Humidity: 20 % to 80 % (Non Condensation)		Temperature: -20 °C to 60 °C / Humidity: 20 % to 80 % (Non Condensation)		
OPTIONS					
Pedestal	TY-ST65P20	TY-ST58P20	TY-ST58P20	TY-ST42P50	TY-ST42P50
Wall-hanging Bracket	TY-WK70PV50	TY-WK70PV50	—	—	—
Protective Glass	TY-PG80LF50	TY-PG70LF50	—	—	—
Digital Interface Box	—	—	ET-YFB100G	ET-YFB100G	ET-YFB100G
Early Warning Software	—	—	ET-SWA100	ET-SWA100	ET-SWA100
Multi Window Processor	ET-MWP100G	ET-MWP100G	ET-MWP100G	ET-MWP100G	ET-MWP100G
HD-SDI Terminal Board	TY-FB10HD	TY-FB10HD	—	—	—
Dual HDMI Terminal Board	TY-FB10HMD	TY-FB10HMD	—	—	—
Slot in PC	PLUGTHA54*2	PLUGTHA54*2	—	—	—

*1: If the temperature is 40 °C to 60 °C, please keep in humidity 20 % to 40 %.

*2: Europe only.



	Model no.	TH-55LF6	TH-47LF6	TH-42LF6
DISPLAY	Screen Size (Diagonal)/Aspect Ratio	55-inch (1,387 mm)/16:9	47-inch (1,192 mm)/16:9	42-inch (1,067 mm)/16:9
	Panel Type	IPS/E-LED	IPS/E-LED	IPS/E-LED
	Effective Display Area (W x H)	1,209 x 680 mm	1,039x 584 mm	930 x 523 mm
	Number of Pixels (H x V)	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels
	Brightness	450 cd/m ² (Typ)	450 cd/m ² (Typ)	450 cd/m ² (Typ)
	Contrast Ratio	1,300:1	1,300:1	1,300:1
	Response Time	12 ms (G to G)	12 ms (G to G)	12 ms (G to G)
Viewing Angle	178°/178°	178°/178°	178°/178°	
TERMINAL	VIDEO In	BNC x 1		BNC x 1
	Audio In (L/R)	Pin Jack x 1 set		Pin Jack x 1 set
	HDMI In	HDMI Type A Connector x 2		HDMI Type A Connector x 2
	Component In	BNC x 1 set		BNC x 1 set
	Audio In (L/R)	Pin Jack x 1 set		Pin Jack x 1 set
	DVI-D In	DVI-D 24-pin x 1		DVI-D 24-pin x 1
	Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)		Stereo Mini Jack (M3) x 1 (Shared with PC In)
	DVI-D Out	DVI-D 24-pin x 1		DVI-D 24-pin x 1
	PC In	Mini D-Sub 15-pin x1 (Female)		Mini D-Sub 15-pin x1 (Female)
	Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)		Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)
	Audio Out (L/R)	Stereo Mini Jack (M3) x 1		Stereo Mini Jack (M3) x 1
	Serial In/Out	D-Sub 9-pin x 1/D-Sub 9-pin x 1, RS-232C Compatible		D-Sub 9-pin x 1/D-Sub 9-pin x 1, RS-232C Compatible
	DIGITAL LINK	RJ45 x 1 (Shared with LAN)		RJ45 x 1 (Shared with LAN)
LAN	RJ45 100BASE-TX, Compatible with PLink™ (Shared with DIGITAL LINK)		RJ45 100BASE-TX, Compatible with PLink™ (Shared with DIGITAL LINK)	
IR In/Out	IR x 1/x 1		IR x 1/x 1	
Function Slot	—		—	
GENERAL	Power Requirements	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz
	Power Consumption	150 W	140 W	125 W
	Power Off Condition	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W
	Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
	Dimensions (W x H x D)	1,248 x 718 x 68 mm	1,076 x 621 x 68 mm	967 x 560 x 68 mm
	Carton Size (W x H x D)	1,411 x 940 x 204 mm	1,210 x 826 x 204 mm	1,113 x 705 x 222 mm
	Bezel Width	16 mm	16 mm	16 mm
	Weight	Approx. 25.8 kg	Approx. 16.7 kg	Approx. 14.5 kg
	Gross Weight	Approx. 31.5 kg	Approx. 21.8 kg	Approx. 18.5 kg
	Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm
	Built-in Speakers	10 W [5W x 5 W]	10 W [5W + 5 W]	10 W [5W + 5 W]
Operating Environment	Temperature: 0 °C to 40 °C / Humidity: 20 % to 80 % (Non Condensation)		Temperature: 0 °C to 40 °C / Humidity: 20 % to 80 % (Non Condensation)	
Storage Environment	Temperature: -20 °C to 60 °C / Humidity: 20 % to 80 % (Non Condensation)		Temperature: -20 °C to 60 °C / Humidity: 20 % to 80 % (Non Condensation)	
OPTIONS	Pedestal	TY-ST58P20	TY-ST42P50	TY-ST42P50
	Digital Interface Box	ET-YFB100G	ET-YFB100G	ET-YFB100G
	Early Warning Software	ET-SWA100	ET-SWA100	ET-SWA100
	Multi Window Processor	ET-MWP100G	ET-MWP100G	ET-MWP100G

Bright, Full HD (1920 x 1080) Professional LED Display

LF50 LF60 LF6


In addition to the high resolution of Full-HD and the wide viewing angle of the IPS panel, the LF Series features high brightness. This makes it possible to display crisp, clear images even in bright places, for signage with excellent information transmission performance.



IPS Panel and LED Backlight Provide Light Weight, a Thin Profile, and Low Power Consumption

LF60 LF6

Detailed Full-HD picture quality and the wide viewing angle of the IPS panel produce clear, beautiful images in large spaces. The use of an LED backlight allows signage to be used for long periods with excellent visibility and low power consumption, to help reduce running costs.

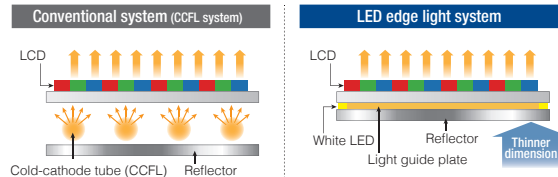

The CCFL system requires the installation of multiple tubes that illuminate in the same way as fluorescent lamps behind the LCD panel. Thus, the display unit becomes thick.

The edge light system requires a small number of LED units because the lights are installed only on the edges of the LCD panel. This saves energy. The display unit can also be made thin and light.

Flexible, Vertical Installation

LF50 LF60 LF6


The display can be installed either horizontally or vertically to match the content and installation location without being affected by "Mura" (unevenness). This is because the display has relatively uniform pressure distribution as compared to a TV panel, which results in far better stability. Regardless of the installation direction, the lamp life stays the same since a constant operating temperature is maintained.



DIGITAL LINK Function Enables Simple Installation and Low System Costs

LF60 LF6

Using DIGITAL LINK makes it possible to transmit video, audio and control signals over a long distance (up to 100 m) with a single LAN cable*1. Easy cabling also reduces labor during setup. This provides transmission of high-quality images and sounds, as well as remote control.

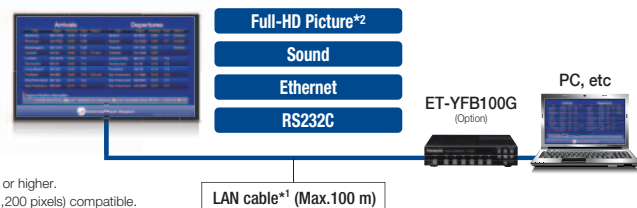

*1: CAT5e (STP) cable or higher.
*2: WUXGA (1,920 x 1,200 pixels) compatible.

24/7 Operation

LF50 LF60 LF6

The tough design makes the display panel suitable for use as signage that operates all day and night in places such as restaurants, shopping malls and transportation facilities.



* In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.

Built-in Speaker

LF60 LF6

The speaker is built into the rear of the display. There is no need for external speakers when using content that has a soundtrack.



Fan-less Design

LF50 LF60 LF6

The fan-less design prevents malfunctions otherwise caused by dust particles brought in by the fan. This enables safe installation in crowded areas.

Stylish Slim Design and Light Weight

LF50 LF60 LF6

Narrow bezel allows it to blend in with the installation space and gives greater visibility to the images on display. The bezel is also less noticeable in multi-screen displays, for effective large-screen applications.

A Slim Design that Fits almost any Installation Location

LF50 LF60 LF6

The display can be installed in a permanent hanging position using eyebolts. Wall-mount brackets and hanging fixtures in compliance with VESA specifications can also be used for flexible installation.

* 55-inch only.



Full Power Plug-In PC for SLOT2.0 Platform

LF50

The new, full power Plug-in PC solution that supports virtually all digital signage software platforms with multiple zones of content. The PLUGTHA54 Plug-In PC combines a fully contained "all-in-one" digital signage solution with the ease and flexibility of Panasonic SLOT2.0 plug-in architecture. The PLUGTHA54 can run the most robust digital signage applications and high-quality graphics 24/7/365 with superior reliability and low failure rates for a lower TCO.



- Intel® i5 Processor
- Windows® 7 pro (64bit)
- 320 GB HDD
- Built-in Wi-Fi and RJ-45
- 3G/4G Ready for 24/7/365 digital signage solution

* Europe only.



Model no.	TH-55LFV50	TH-55LFV5	TH-47LFV5
Screen Size (Diagonal)/Aspect Ratio	55-inch (1,387 mm)/16:9	55-inch (1,387 mm)/16:9	47-inch (1,192 mm)/16:9
Panel Type	IPS/D-LED	IPS/D-LED	IPS/D-LED
Effective Display Area (W x H)	1,209 x 680 mm	1,209 x 680 mm	1,039 x 584 mm
Number of Pixels (H x V)	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels
Brightness	800 cd/m ² (Typ)	500 cd/m ² (Typ)	500 cd/m ² (Typ)
Contrast Ratio	1,400:1	1,400:1	1,400:1
Response Time	10 ms (G to G)	10 ms (G to G)	12 ms (G to G)
Viewing Angle	178°/178°	178°/178°	178°/178°
Panel Surface Treatment	Anti-Reflection	Anti-Glare Treatment (Haze 10 %)	Anti-Glare Treatment (Haze 10 %)
VIDEO In	BNC x 1	BNC x 1	BNC x 1
Audio In (L/R)	Pin Jack x 1 set (Shared with Component In)	Pin Jack x 1 set (Shared with Component In)	Pin Jack x 1 set (Shared with Component In)
HDMI In	HDMI Type A Connector x 1	HDMI Type A Connector x 1	HDMI Type A Connector x 1
Component/RGB In	BNC x 1 set	BNC x 1 set	BNC x 1 set
Audio In (L/R)	Pin Jack x 1 set (Shared with VIDEO In)	Pin Jack x 1 set (Shared with VIDEO In)	Pin Jack x 1 set (Shared with VIDEO In)
DVI-D In	DVI-D 24-pin x 1	DVI-D 24-pin x 1	DVI-D 24-pin x 1
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	Stereo Mini Jack (M3) x 1 (Shared with PC In)
DVI-I Out	DVI-I 29-pin x 1	DVI-I 29-pin x 1	DVI-I 29-pin x 1
PC In	Mini D-Sub 15-pin x1 (Female)	Mini D-Sub 15-pin x1 (Female)	Mini D-Sub 15-pin x1 (Female)
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)
Audio Out (L/R)	Pin Jack x 1 set	Pin Jack x 1 set	Pin Jack x 1 set
Serial In/Out	D-Sub 9-pin x 1/D-Sub 9-pin x 1, RS-232C Compatible	D-Sub 9-pin x 1/D-Sub 9-pin x 1, RS-232C Compatible	D-Sub 9-pin x 1/D-Sub 9-pin x 1, RS-232C Compatible
Function Slot	—	—	—
IR Transmitter In/Out	IR x 1/x 1	IR x 1/x 1	IR x 1/x 1
LAN	RJ45 x 1 (Web Browser Control Only)	RJ45 x 1 (Web Browser Control Only)	RJ45 x 1 (Web Browser Control Only)
Power Requirements	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz
Power Consumption	320 W	220 W	160 W
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
Dimensions (W x H x D)	1,216 x 687 x 122 mm	1,216 x 687 x 122 mm	1,045 x 590 x 109 mm
Carton Size (W x H x D)	1,551 x 979 x 450 mm	1,551 x 979 x 450 mm	1,420 x 995 x 514 mm
Bezel Width	3.4 mm (Left/Top), 1.9 mm (Right/Bottom)	3.4 mm (Left/Top), 1.9 mm (Right/Bottom)	3.2mm (Left/Top), 1.7 mm (Right/Bottom)
Bezel to Bezel	5.3 mm (Multi Screen)	5.3 mm (Multi Screen)	4.9 mm (Multi Screen)
Weight	Approx. 36.0 kg	Approx. 36.0 kg	Approx. 25.0 kg
Gross Weight	Approx. 48.0 kg	Approx. 52.0 kg	Approx. 40.0 kg
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm
External Speaker	8 Ω, 20 W [10 W + 10 W]	8 Ω, 20 W [10 W + 10 W]	8 Ω, 20 W [10 W + 10 W]
Operating Environment	Temperature: 0 °C to 40 °C / Humidity: 10 % to 90 % (Non Condensation)	Temperature: 0 °C to 40 °C / Humidity: 10 % to 90 % (Non Condensation)	Temperature: 0 °C to 40 °C / Humidity: 10 % to 90 % (Non Condensation)
Storage Environment	Temperature: -20 °C to 60 °C / Humidity: 10 % to 90 % (Non Condensation)	Temperature: -20 °C to 60 °C / Humidity: 10 % to 90 % (Non Condensation)	Temperature: -20 °C to 60 °C / Humidity: 10 % to 90 % (Non Condensation)
Remote Control Kit	TY-RM50VW	TY-RM50VW	TY-RM50VW
Cover Frame Kit	TY-CF55VW50	TY-CF55VW50	TY-CF47VW5
Multi Window Processor	ET-MWP100G	ET-MWP100G	ET-MWP100G

Super Narrow Bezel with 4.9-mm* Thickness

The super-narrow bezel results in joints that are only 4.9 mm wide for video wall installations. Even in large-screen configurations, the screen borders can barely be seen, so images are powerful and natural.



* The 55-inch model is 5.3 mm wide.

High Reliability Enables Continuous 24-Hour Operation

The use of a highly durable panel and electronic components allows continuous 24-hour operation, ideal for installation in public places, surveillance stations, etc. A built-in cooling fan automatically operates (when set to Auto) depending on the temperature. This prevents overheating in the upper screens of a multi-screen installation, which are easily subject to heating.



* In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.

Turnkey Solution for Multi-Window Processor

The ET-MWP100G Multi Window Processor makes it possible to quickly and efficiently combine multiple displays and projectors into a video wall or a multi vision system.



Multi Window Processor
ET-MWP100G (Optional)



Model no.	TH-47LFX60	TH-47LFX6
Screen Size (Diagonal)/Aspect Ratio	47-inch (1,192 mm)/16:9	47-inch (1,192 mm)/16:9
Panel Type	IPS/D-LED	IPS/CCFL
Effective Display Area (W x H)	1,039 x 584 mm	1,039 x 584 mm
Number of Pixels (H x V)	1,920 x 1,080 pixels	1,920 x 1,080 pixels
Brightness	2,000 cd/m ² (Typ)	1,000 cd/m ² (Typ)
Contrast Ratio	1,300:1	1,200:1
Response Time	10 ms (G to G)	—
Viewing Angle	178°/178°	178°/178°
VIDEO In	—	—
Audio In (L/R)	—	—
HDMI In	HDMI Type A Connector x 1	
Component/RGB In	—	
Audio In (L/R)	—	
DVI-D In	DVI-D 24-pin x 1	
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	
PC In	Mini D-Sub 15-pin x1 (Female)	
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	
Audio Out (L/R)	Pin Jack x 1 set	
DIGITAL LINK	RJ45 x 1 (Shared with LAN)	
Serial In	D-Sub 9-pin x 1, RS-232C Compatible	
LAN	RJ45 x 1 100BASE-TX, Compatible with PLink™ (Shared with DIGITAL LINK)	
Power Requirements	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz
Power Consumption	370 W	370 W
Power Off Condition	Approx. 0.3 W	Approx. 0.3 W
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W
Outdoor Mode On	Approx. 41 W	Approx. 41 W
Network Stand-by Mode	Approx. 16 W	Approx. 16 W
Dimensions (W x H x D)	1,162 x 706 x 216 mm	1,162 x 706 x 216 mm
Carton Size (W x H x D)	1,308 x 851 x 323 mm	1,308 x 851 x 323 mm
Bezel Width	32 mm	32 mm
Weight	Approx. 47.0 kg	Approx. 49.5 kg
Gross Weight	Approx. 55.0 kg	Approx. 58.0 kg
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 400 mm
Built-in Speakers	—	—
Direct Sunlight Capability	Yes (Built-in Air Cooling System)	Yes (Built-in Air Cooling System)
Dust and Water Resistant Level	IP55	IP44
Operating Environment*1	Temperature: -20 °C*2 to 50 °C / Humidity: 20 % to 80 % (Non Condensation)	Temperature: -20 °C*2 to 40 °C / Humidity: 20 % to 80 % (Non Condensation)
Storage Environment	Temperature: -20 °C to 60 °C / Humidity: 20 % to 80 % (Non Condensation)	Temperature: -20 °C to 60 °C / Humidity: 20 % to 80 % (Non Condensation)
Replacement Air Filter	TY-AF60STD	TY-AF6STD
Digital Interface Box	ET-YFB100G	ET-YFB100G
Early Warning Software	ET-SWA100	—

*1: Don't use in places where the presence of corrosive gases or salt damage area.
*2: When used in Outdoor mode.

Dust and Water Resistance Performance – Ideal for Outdoor Installation

IP level dust and water resistant performance provides tough durability in harsh conditions.

* What is IP?: This denotes the degree of dust and water resistance. IP is an abbreviation of the international standard Ingress Protection. (IEC60529)

LFX60 IP-55		LFX6 IP-44	
Dust Resistance		Water Resistance	
Level	Degree of Protection	Level	Degree of Protection
5	Protected against dust limited ingress (no harmful deposit)	5	Protected against water jet.
4	Protection from solid bodies greater than 1 mm in diameter	4	Protection of the display from water splashing (in both vertical and horizontal directions)

High-Brightness 2,000-cd/m² Model with Wide-Viewing-Angle IPS Panel and LED Backlight


Images are clear even in brightly lit places. Full 2,000 cd/m²* brightness maintains excellent visibility under direct sunlight. This makes the LFX ideal for installation in drive-through lanes. And because the brightness isn't affected by external light, information such as menu items and prices remain clear and easy to read.



* The LFX60 only. The LFX6 has 1,000 cd/m² of brightness.

Forced Air-Cooling System Helps to Prevent Blackouts and Dew Condensation

Outside air is brought into the cabinet to produce an airflow between the front glass and the LCD panel. This suppresses internal temperature rises and prevents blackouts when the display is installed outdoors. It also serves as a countermeasure against condensation.

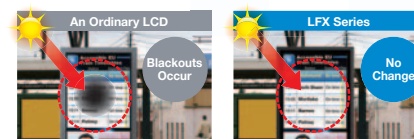


Direct sunlight raises the LCD panel temperature and causes blackouts. The LFX operates stably even outdoors under direct sunlight.

DIGITAL LINK for Transmission of Video, Audio and Control Signals for up to 100 m with a Single LAN Cable


Only a single LAN cable*1 is required to transmit uncompressed HD video, audio and control signals for a distance of up to 100 m. This enables indoor installation of the PC and other devices connected to the display at an outdoor location in order to protect the PC and devices from rain and dust. Since only one cable needs to be connected between the PC and panel, cable routing work is quick and easy. Because a control signal can also be sent simultaneously, it is easy to upgrade the system by combining it with the optional ET-YFB100G Digital Interface Box.

*1: Use an STP cable of CAT5e or higher.
*2: WUXGA (1,920 x 1,200 pixels) compatible.

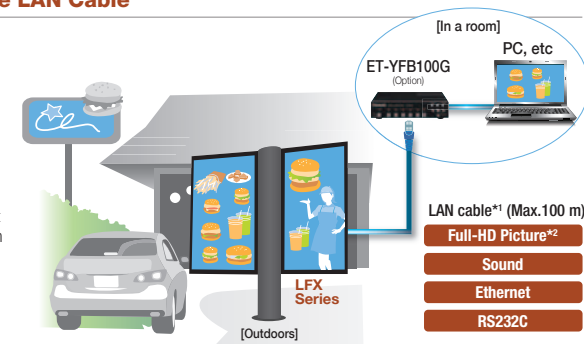

Aluminum Cabinet and Tempered Glass

The aluminum cabinet strongly resists corrosion. In addition, tempered glass ensures rugged strength against impacts.

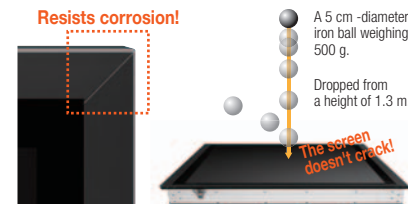

Highly Durable Display Resists Temperature Changes and the Summer Sun


Featuring an operating temperature range of -20 °C*1 to 50 °C*2, performance remains unchanged even in cold and hot climates.

*1: When used in Outdoor mode.
*2: The LFX60 range is up to 50°C, and the LFX6 range is up to 40 °C.

Supporting Stable Operation — Early Warning Software


Early Warning Software monitors the status of display connected to an intranet and informs you when an abnormality is detected or predicted, and when there are symptoms of trouble. The minimizes display downtime to support more stable operation.

* The LFX60 only.

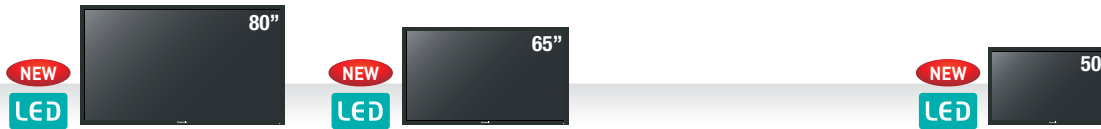

Model no.	TH-80LFB70	TH-65LFB70	TH-50LFB70
DISPLAY			
Screen Size (Diagonal)/Aspect Ratio	80-inch (2,032 mm)/16:9	65-inch (1,638 mm)/16:9	50-inch (1,257 mm)/16:9
Panel Type	VA Panel/E-LED	VA Panel/E-LED	VA Panel/E-LED
Effective Display Area (W x H)	1,771 x 996 mm	1,428 x 803 mm	1,095 x 616 mm
Number of Pixels (H x V)	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels
Brightness	350 cd/m ² (Typ)	350 cd/m ² (Typ)	350 cd/m ² (Typ)
Contrast Ratio	5,000:1	4,000:1	5,000:1
Response Time	4 ms (G to G)	6.5 ms (G to G)	6.5 ms (G to G)
Viewing Angle	176°/176°	178°/178°	176°/176°
TOUCH PANEL			
Detection Method	Infrared Blocking Detection Method	Infrared Blocking Detection Method	Infrared Blocking Detection Method
PC Connection Port	USB (3.0 Compliant)	USB (3.0 Compliant)	USB (3.0 Compliant)
TERMINAL			
VIDEO In	BNC x 1	BNC x 1	BNC x 1
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with Component/RGB In)	Stereo Mini Jack (M3) x 1 (Shared with Component/RGB In)	Stereo Mini Jack (M3) x 1 (Shared with Component/RGB In)
HDMI In	HDMI Type A Connector x 2	HDMI Type A Connector x 2	HDMI Type A Connector x 2
Component/RGB In	BNC x 1 set	BNC x 1 set	BNC x 1 set
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with VIDEO In)	Stereo Mini Jack (M3) x 1 (Shared with VIDEO In)	Stereo Mini Jack (M3) x 1 (Shared with VIDEO In)
DVI-D In	DVI-D 24-pin x 1	DVI-D 24-pin x 1	DVI-D 24-pin x 1
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	Stereo Mini Jack (M3) x 1 (Shared with PC In)
PC In	Mini D-Sub 15-pin x1 (Female), Plug & Play (VESA DDC 2B)	Mini D-Sub 15-pin x1 (Female), Plug & Play (VESA DDC 2B)	Mini D-Sub 15-pin x1 (Female), Plug & Play (VESA DDC 2B)
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)
PC Out	Mini D-Sub 15-pin x1	Mini D-Sub 15-pin x1	Mini D-Sub 15-pin x1
USB A	TYPE A USB Connector x 1 (For Memory Viewer)	TYPE A USB Connector x 1 (For Memory Viewer)	TYPE A USB Connector x 1 (For Memory Viewer)
USB B	TYPE B USB Connector x 1 (For Touch Panel)	TYPE B USB Connector x 1 (For Touch Panel)	TYPE B USB Connector x 1 (For Touch Panel)
Serial	D-Sub 9-pin x 1, RS-232C Compatible	D-Sub 9-pin x 1, RS-232C Compatible	D-Sub 9-pin x 1, RS-232C Compatible
DIGITAL LINK	RJ45 x 1 (Shared with LAN)	RJ45 x 1 (Shared with LAN)	RJ45 x 1 (Shared with LAN)
LAN	RJ45 x 1, 100BASE-TX, Compatible with PjLink™ (Shared with DIGITAL LINK)	RJ45 x 1, 100BASE-TX, Compatible with PjLink™ (Shared with DIGITAL LINK)	RJ45 x 1, 100BASE-TX, Compatible with PjLink™ (Shared with DIGITAL LINK)
Function Slot	SLOT2.0 x 1	SLOT2.0 x 1	SLOT2.0 x 1
GENERAL			
Power Requirements	220-240 V AC, 50/60 Hz	220-240 V AC, 50/60 Hz	220-240 V AC, 50/60 Hz
Power Consumption	350 W	T.B.D.	T.B.D.
Power Off Consumption	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
Dimensions (W x H x D)	1,868 x 1,093 x 104 mm	1,517 x 892 x 106 mm	1,185 x 705 x 103 mm
Carton Size (W x H x D)	2,075 x 1,319 x 404 mm	T.B.D.	T.B.D.
Bezel Width	43 mm	39 mm	39 mm
Weight	Approx. 84.0 kg	T.B.D.	T.B.D.
Gross Weight	Approx. 103.0 kg	T.B.D.	T.B.D.
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm	684 x 300 mm	400 x 300 mm
Protective Glass Thickness	Approx. 4 mm /Anti-Glare	Approx. 3.2 mm /Anti-Glare	Approx. 2.5 mm /Anti-Glare
Built-in Speaker	20 W [10 W + 10 W] (10 % THD)	20 W [10 W + 10 W] (10 % THD)	20 W [10 W + 10 W] (10 % THD)
External Speaker	8 Ω, 20 W [10 W + 10 W] (10 % THD)	8 Ω, 20 W [10 W + 10 W] (10 % THD)	T.B.D.
Operating Environment	Temperature: 0 °C to 40 °C, Humidity: 20 % to 80 % (Non Condensation)	Temperature: 0 °C to 40 °C, Humidity: 20 % to 80 % (Non Condensation)	Temperature: 0 °C to 40 °C, Humidity: 20 % to 80 % (Non Condensation)
Storage Environment	Temperature: -20 °C to 60 °C, Humidity: 20 % to 80 % (Non Condensation)	Temperature: -20 °C to 60 °C, Humidity: 20 % to 80 % (Non Condensation)	Temperature: -20 °C to 60 °C, Humidity: 20 % to 80 % (Non Condensation)
OPTIONS			
Pedestal	TY-ST65P20	TY-ST65P20	TY-ST42P50
Wall-hanging Bracket	TY-WK70PV50 (Vertical)	—	TY-WK42PV20 (Vertical)
Wall-hanging Bracket (Angled)	—	TY-WK65PR20 (Vertical/Angled)	TY-WK42PR20 (Angled)
Ceiling-hanging Bracket	—	—	TY-CE42PS20
Mobile Stand	TY-ST80LF70	TY-ST65PB2	TY-ST50PB2/TY-ST58PF20
Easy Wireless Stick	ET-UW100	ET-UW100	ET-UW100
Digital Interface Box	ET-YFB100G	ET-YFB100G	ET-YFB100G
Early Warning Software	ET-SWA100	ET-SWA100	ET-SWA100
FUNCTION BOARD			
HD-SDI Terminal Board	TY-FB9HD	TY-FB9HD	TY-FB9HD
HD-SDI Terminal Board with Audio	TY-FB10HD	TY-FB10HD	TY-FB10HD
Dual Link HD-SDI Terminal Board	TY-FB11DHD	TY-FB11DHD	TY-FB11DHD
Dual HDMI Terminal Board	TY-FB10HMD	TY-FB10HMD	TY-FB10HMD
BNC Dual Video Terminal Board	TY-FB9BD	TY-FB9BD	TY-FB9BD
DVI-D Terminal Board	TY-FB11DD	TY-FB11DD	TY-FB11DD
Slot in PC	PLUGTHA54*	PLUGTHA54*	PLUGTHA54*

* Europe only.

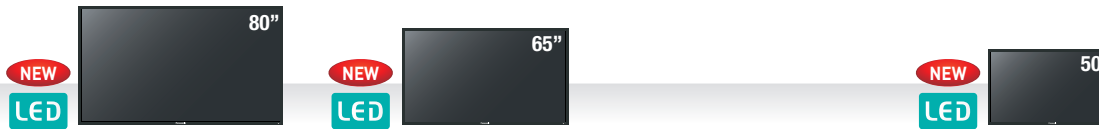

Model no.	TH-80LFC70	TH-65LFC70	TH-50LFC70
DISPLAY			
Screen Size (Diagonal)/Aspect Ratio	80-inch (2,032 mm)/ 16:9	65-inch (1,638 mm)/16:9	50-inch (1,257 mm)/16:9
Panel Type	VA Panel/E-LED	VA Panel/E-LED	VA Panel/E-LED
Effective Display Area (W x H)	1,771 x 996 mm	1,428 x 803 mm	1,095 x 616 mm
Number of Pixels (H x V)	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels
Brightness	350 cd/m ² (Typ)	350 cd/m ² (Typ)	350 cd/m ² (Typ)
Contrast Ratio	5,000:1	4,000:1	5,000:1
Response Time	4 ms (G to G)	6.5 ms (G to G)	6.5 ms (G to G)
Viewing Angle	176°/176°	178°/178°	176°/176°
TERMINAL			
VIDEO In	BNC x 1		BNC x 1
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with Component/RGB In)		Stereo Mini Jack (M3) x 1 (Shared with Component/RGB In)
HDMI In	HDMI Type A Connector x 2		HDMI Type A Connector x 2
Component/RGB In	BNC x 1 set		BNC x 1 set
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with VIDEO In)		Stereo Mini Jack (M3) x 1 (Shared with VIDEO In)
DVI-D In	DVI-D 24-pin x 1		DVI-D 24-pin x 1
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)		Stereo Mini Jack (M3) x 1 (Shared with PC In)
PC In	Mini D-Sub 15-pin x1 (Female), Plug & Play (VESA DDC 2B)		Mini D-Sub 15-pin x1 (Female), Plug & Play (VESA DDC 2B)
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)		Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)
PC Out	Mini D-Sub 15-pin x 1		Mini D-Sub 15-pin x 1
USB	TYPE A USB Connector x 1 (For Memory Viewer)		TYPE A USB Connector x 1 (For Memory Viewer)
Serial	D-Sub 9-pin x 1, RS-232C Compatible		D-Sub 9-pin x 1, RS-232C Compatible
DIGITAL LINK	RJ45 x 1 (Shared with LAN)		RJ45 x 1 (Shared with LAN)
LAN	RJ45 x 1, 100BASE-TX, Compatible with PLink™ (Shared with DIGITAL LINK)		RJ45 x 1, 100BASE-TX, Compatible with PLink™ (Shared with DIGITAL LINK)
Function Slot	SLOT2.0 x 1		SLOT2.0 x 1
GENERAL			
Power Requirements	220-240 V AC, 50/60 Hz	220-240 V AC, 50/60 Hz	220-240 V AC, 50/60 Hz
Power Consumption	T.B.D.	T.B.D.	T.B.D.
Power off Consumption	T.B.D.	T.B.D.	T.B.D.
Stand-by Condition	T.B.D.	T.B.D.	T.B.D.
Dimensions (W x H x D)	T.B.D.	1,482 x 857 x 92 mm	1,149 x 669 x 89 mm
Carton Size	T.B.D.	T.B.D.	T.B.D.
Bezel Width	T.B.D.	T.B.D.	T.B.D.
Weight	T.B.D.	T.B.D.	T.B.D.
Gross Weight	T.B.D.	T.B.D.	T.B.D.
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm	684 x 300 mm	400 x 300 mm
Protective Glass Thickness	T.B.D.	T.B.D.	T.B.D.
Built-in Speaker	20 W [10 W + 10 W] (10 % THD)	20 W [10 W + 10 W] (10 % THD)	20 W [10 W + 10 W] (10 % THD)
External Speaker	8 Ω, 20 W [10 W + 10 W] (10 % THD)	8 Ω, 20 W [10 W + 10 W] (10 % THD)	T.B.D.
Operating Environment	Temperature: 0 °C to 40 °C, Humidity: 20 % to 80 % (Non Condensation)		Temperature: 0 °C to 40 °C, Humidity: 20 % to 80 % (Non Condensation)
Storage Environment	Temperature: -20 °C to 60 °C, Humidity: 20 % to 80 % (Non Condensation)		Temperature: -20 °C to 60 °C, Humidity: 20 % to 80 % (Non Condensation)
OPTIONS			
Pedestal	TY-ST65P20	TY-ST65P20	TY-ST42P50
Wall-hanging Bracket	TY-WK70PV50 (Vertical)	—	TY-WK42PV20 (Vertical)
Wall-hanging Bracket (Angled)	—	TY-WK65PR20 (Vertical/Angled)	TY-WK42PR20 (Angled)
Ceiling-hanging Bracket	—	—	TY-CE42PS20
Floor Stand	—	—	—
Mobile Stand	TY-ST80LF70	TY-ST65PB2	TY-ST50PB2/TY-ST58PF20
Easy Wireless Stick	ET-UW100	ET-UW100	ET-UW100
Digital Interface Box	ET-YFB100G	ET-YFB100G	ET-YFB100G
Early Warning Software	ET-SWA100	ET-SWA100	ET-SWA100
FUNCTION BOARD			
HD-SDI Terminal Board	TY-FB9HD	TY-FB9HD	TY-FB9HD
HD-SDI Terminal Board with Audio	TY-FB10HD	TY-FB10HD	TY-FB10HD
Dual Link HD-SDI Terminal Board	TY-FB11DHD	TY-FB11DHD	TY-FB11DHD
Dual HDMI Terminal Board	TY-FB10HMD	TY-FB10HMD	TY-FB10HMD
BNC Dual Video Terminal Board	TY-FB9BD	TY-FB9BD	TY-FB9BD
DVI-D Terminal Board	TY-FB11DD	TY-FB11DD	TY-FB11DD
Slot in PC	PLUGTHA54*	PLUGTHA54*	PLUGTHA54*

* Europe only.

Multi Touch Screen LED Displays LFB70 Series/ Network LED Displays LFC70 Series

Simple Touch Control

LFB70


Progress smoothly through your presentation using familiar touch screen gestures to turn pages, zoom in/out content, and navigate through multimedia functions without need of a remote control. Whether using a fingertip to cue content for a presentation, or the stylus pen to jot down notes for the group, you'll be delighted at how this user-friendly touch interface makes complex tasks simple.



Work Together On Screen

LFB70

Built-in whiteboard software lets you turn on the display and start work right away — no need to connect a PC. Up to four people can write at a time, and you can save your pages and email them directly to anyone who missed the meeting. Notes can be made on almost anything, from video and photos to PowerPoint® and PDF documents, and then saved as an image file — simply brilliant for the office or classroom.

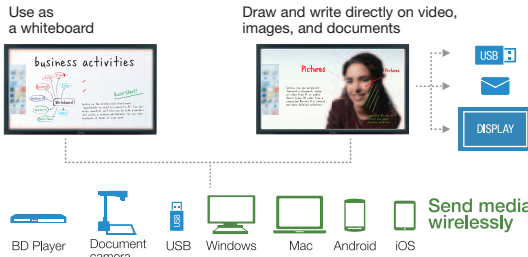


Note: Use of this product shall be in compliance with all relevant and applicable copyright protection laws. Data or work entered by the user into the Product's external inputs (including but not limited to motion pictures and photography) shall be the creation of the user (excluding quoting) or shall be authorized for use by the author(s) of the data or work. Panasonic has no right or authority to grant the Product user any license, rights, and titles to use, modify, copy, or distribute, etc., any data or work not created by the user or used with express permission of the data or work's author(s).

Whiteboard Software Extends Your Capabilities

LFB70

Whiteboard Software*1 for PC offers extra functionality for power users. As well as adding useful tools to the menu palette, the applications six-point touch interface*2 enables a wider variety of gestures for smooth and intuitive control.

- Three operation modes*2 (Whiteboard Function, PowerPoint® Link Mode, and Desktop Operation)
- Recorder function*2
- Image capture
- File operation (import and save)
- Presentation tool*2 (zoom, spotlight, shade, fade-out marker)

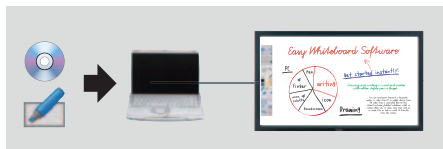

(Windows Version)

Wireless Options for Mobile and PC

LFB70 LFC70

It's simple to get documents from different network-attached devices — such as notebooks, smartphones, and tablet — onto the big screen. These pro displays are compatible with Miracast™ (which doesn't require any software to mirror certain content) as well as dedicated apps that get the media you want up and on screen faster, with no cables or complicated setup.

Miracast™ for Instant Wireless Sharing

Transmit documents, Full HD video, images, and audio from compatible Android devices and Windows PCs to the big screen with Miracast™ — the latest wireless standard that doesn't require software or complicated setup. With no cables, fast connection, and high bandwidth, Miracast™ makes it easy for everyone to contribute.



Wireless Apps for iOS and PC*3

A free iOS app conveniently displays content from iPod touch®, iPhone®, and iPad®, on the big screen, with no cables and no hassle. For PC users, Wireless Manager ME*4 wirelessly transmits a variety of media (including audio*5) from your computer to the display. It includes a Multi-Live mode to facilitate the display of content from up to 16PC or iOS devices simultaneously. Alternatively, you can plug an Easy Wireless Stick (ET-UW100)*6 into your computer's USB port to send content wirelessly*7.




Better Connectivity and Flexibility

LFB70 LFC70

With Panasonic's DIGITAL LINK, based on HDBase™ technology, and SLOT2.0 (which allows for easy installation and removal of customized terminal boards or a modular PC), it costs less money and time to set up the display exactly to your requirements.

DIGITAL LINK

DIGITAL LINK used HDBase™ technology to transmit uncompressed FULL HD video, audio, and control commands through a single CAT5 cable for up to 100 m.

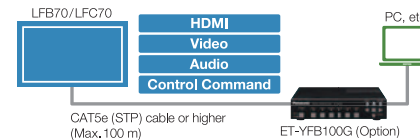

SLOT2.0

SLOT2.0 allows you to add the functions your need to perfectly suite almost any application. Optional function boards including HDMI, HD-SDI, and Plug-in PC can be mounted to support a customized content distribution system.



Easily Connect a Second Display

Use a VGA cable to mirror*8 content on a second display or projector — even the notes added to documents, images, or video during your presentation. This dual-display capability makes both the LFB70 and LFC70 Series ideal for use in larger venues.



*1: Supported by Windows® XP/Windows Vista® /Windows® 7/Windows® 8/Windows® 8.1 and Macintosh (Mac OS X v10.6/v10.7/v10.8/v10.9). Some functions are not supported on Macintosh version.

*2: For Windows only.

*3: Wireless display with devices that are not Miracast™-compatible or wireless display from multiple devices requires the installation of dedicated software.

*4: Supported by Windows® XP/Windows Vista® /Windows® 7/Windows® 8/Windows® 8.1 and Macintosh (Mac OS X v10.6/v10.7/v10.8/v10.9).

*5: Windows® 7 and Windows Vista® users must log in using the Administrator's account. When a Windows® 7 - equipped computer is first used, the sound driver may require adjustment.

*6: The ET-UW100 is available in the following countries and regions as of October 2013: North America, England, Germany, France, Spain, Italy, Belgium, Austria, Sweden, Norway, Denmark, Switzerland, Holland, Finland, Portugal, Greece, Australia, and Japan.

*7: The ET-UW100 will not transfer audio files. A firmware update is necessary to use the ET-UW100.

*8: Support 1080/60p signal only.



Model no.	TH-65LFE7	TH-50LFE6	TH-42LFE6
Screen Size (Diagonal)/Aspect Ratio	65-inch (1,639 mm)/16:9	50-inch (1,257 mm)/16:9	42-inch (1,067 mm)/16:9
Panel Type	MVA/E-LED	VA Panel/E-LED	VA Panel/E-LED
Effective Display Area (W x H)	1,428 x 803 mm	1,095 x 616 mm	930 x 523 mm
Number of Pixels (H x V)	1,920 x 1,080 pixels	1,920 x 1,080 pixels	1,920 x 1,080 pixels
Brightness	350 cd/m ² (Typ)	350 cd/m ² (Typ)	350 cd/m ² (Typ)
Contrast Ratio	5,000:1	5,000:1	5,000:1
Response Time	6.5 ms (G to G)	6.5 ms (G to G)	9.5 ms (G to G)
Viewing Angle	176°/176°	176°/176°	176°/176°
VIDEO In	—	—	—
Audio In (L/R)	—	—	—
HDMI In	HDMI Type A Connector x 2	HDMI Type A Connector x 1	HDMI Type A Connector x 1
Component/RGB In	—	—	—
Audio In (L/R)	—	—	—
DVI-D In	DVI-D 24-pin x 1	DVI-D 24-pin x 1	DVI-D 24-pin x 1
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	Stereo Mini Jack (M3) x 1 (Shared with PC In)	Stereo Mini Jack (M3) x 1 (Shared with PC In)
DVI-D Out	—	—	—
PC In	Mini D-Sub 15-pin x1 (Female)	Mini D-Sub 15-pin x1 (Female)	Mini D-Sub 15-pin x1 (Female)
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)
Audio Out (L/R)	Stereo Mini Jack (M3) x 1	Stereo Mini Jack (M3) x 1	Stereo Mini Jack (M3) x 1
Serial In	D-Sub 9-pin x 1, RS-232C Compatible	D-Sub 9-pin x 1, RS-232C Compatible	D-Sub 9-pin x 1, RS-232C Compatible
LAN	RJ45 x 1 10BASE-T/100BASE-TX, Compatible with PLink™	RJ45 x 1 10BASE-T/100BASE-TX, Compatible with PLink™	RJ45 x 1 10BASE-T/100BASE-TX, Compatible with PLink™
Function Slot	—	—	—
Power Requirements	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz	220-240 V AC, 50 Hz/60 Hz
Power Consumption	T.B.D.	90 W	65 W
Power Off Condition	T.B.D.	Approx. 0.5 W	Approx. 0.5 W
Stand-by Condition	T.B.D.	Approx. 0.5 W	Approx. 0.5 W
Dimensions (W x H x D)	1,458 x 840 x 52 mm	1,121 x 655 x 49 mm	957 x 564 x 49 mm
Carton Size (W x H x D)	1,574 x 949 x 227 mm (T.B.D.)	1,461 x 753 x 127 mm	1,236 x 662 x 127 mm
Bezel Width	10.8 mm (Left/Right/Top), 17.9 mm (Bottom) [T.B.D.]	9.0 mm (Left/Right/Top), 10 mm (Bottom)	9.0 mm (Left/Right/Top), 10 mm (Bottom)
Weight	Approx. 34.0 kg	Approx. 18.0 kg	Approx. 13.5 kg
Gross Weight	Approx. 40.0 kg (T.B.D.)	Approx. 22.0 kg	Approx. 17.0 kg
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm	VESA Compliant 400 x 200 mm	VESA Compliant 400 x 400 mm
Built-in Speakers	20 W [10 W + 10 W] (10 % THD)	10 W [5 W + 5 W] (10 % THD)	10 W [5 W + 5 W] (10 % THD)
Operating Environment	Temperature: 0 °C to 40 °C, Humidity: 20 % to 80 % (Non condensation)		Temperature: 0 °C to 40 °C, Humidity: 20 % to 80 % (Non Condensation)
Storage Environment	Temperature: -20 °C to 60 °C, Humidity: 20 % to 80 % (Non Condensation)		Temperature: -20 °C to 60 °C, Humidity: 20 % to 80 % (Non Condensation)
Pedestal	TY-ST65PE7	TY-ST42PE6	TY-ST42PE6
Early Warning Software	ET-SWA100	—	—

LED backlight provide light weight, a thin profile, and low power consumption


Detailed Full-HD picture quality and the beautiful images in large spaces. The use of an LED backlight allows signage to be used for long periods with excellent visibility and low power consumption, to help reduce running costs.



Text and intricate patterns are crisply displayed.

A stylish design with large screen and narrow 9 mm* bezel

The stylish design combines a 9 mm bezel and a depth of only 49 mm*. There is less visual bulk, so the display seems to blend into its surroundings. This makes the image stand out even more, for greater, eye-catching visibility.

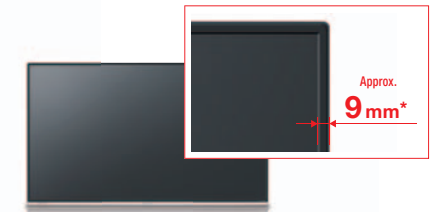

* LFE6 Series only. (TH-65LFE7 is 10.8 mm bezel width and 52 mm depth.)

Standard-equipped input/output terminals for signage use

The input/output terminals (HDMI, DVI-D, PC-IN) and control terminals (RS232C, LAN) needed for signage use are provided as standard equipment.

Built-in Speaker

The speaker is built into the rear of the display. There is no need for external speakers when using content that has a soundtrack.



		Indoor								Video Wall				Outdoor		Multi Touch Screen			Network			Standard			
		TH-80LF50	TH-70LF50	TH-55LF60	TH-47LF60	TH-42LF60	TH-55LF6	TH-47LF6	TH-42LF6	TH-55LFV50		TH-55LFV5	TH-47LFV5	TH-47LFX60	TH-47LFX6	TH-80LFB70	TH-65LFB70	TH-50LFB70	TH-80LFC70	TH-65LFC70	TH-50LFC70	TH-65LFE7	TH-50LFE6	TH-42LFE6	
Size (inch)		80	70	55	47	42	55	47	42	55		55	47	47	47	80	65	50	80	65	50	65	50	42	
SPECIFICATION	Touch Operation	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	—	—	—	—	—	—	
	IP Rating	—	—	—	—	—	—	—	—	—	—	—	—	IP55	IP44	—	—	—	—	—	—	—	—	—	
	24/7 Operation	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	—	—	—	—	—	—	—	—	—	—	—	
	DIGITAL LINK	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	
	Anti-Glare	—	—	—	—	—	—	—	—	—	—	Yes	Yes	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	
INSTALLATION	Outdoor Installation	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	—	—	—	—	—	—	—	—	—	—	
	Video Wall	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	—	—	—	—	—	—	—	Yes	Yes*	Yes*
	Portrait	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	—	—	—	—	—	—	Yes	—	—	
	Pre Calibration	—	—	—	—	—	—	—	—	Yes	—	Yes	Yes	—	—	—	—	—	—	—	—	—	—	—	
	Narrow Bezel	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	—	—	—	—	—	—	—	—	Yes	Yes	Yes	
	Fan less Design	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	
	SLOT2.0	Yes	Yes	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	
	Ceiling-Suspension	Yes	Yes	Yes	—	—	Yes	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	Monitor Out	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	
FUNCTION	Built-in Whiteboard	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	—	—	—	—	—	—	—	
	Memory Viewer	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	
	Wireless Function	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	
	Micacast™	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	
	LAN Control	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Input Search	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Digital Zoom	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Seam Hides Video Off Mode	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	—	—	—	—	—	—	Yes	Yes	Yes	
	Daisy-Chain Connection	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	—	—	—	—	—	—	—	—	—	—	—	
	Power on Screen Delay	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	—	—	—	—	—	—	Yes	Yes	Yes	
	Display ID Control	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	PC/DVI-D Power Management	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	HDMI Power Management	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	
	Audio Input Select	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	
	Picture in Picture	—	—	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	
	Brightness Sensor	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Power Save Mode	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Input/Button Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Remocoon User Level	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Weekly Command Timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	—	—	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Screen Saver	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Outdoor Mode	—	—	—	—	—	—	—	—	—	—	—	—	Yes	Yes	—	—	—	—	—	—	—	—	—		

* Only compatible with 5 displays horizontally.