



Crisp, Clear Information is Provided with High Brightness.  
Ideal for Outdoor Places Subject to Rain,  
Dust and Strong Sunlight

**Product specification**

Model No.	<b>TH-47LFX60</b>
<b>DISPLAY</b>	
Screen Size (Diagonal)	47-inch class (1,192 mm)
Aspect Ratio	16:9
Effective Display Area (W x H)	1,039 x 584 mm (40.9" x 23.0")
Panel Type	IPS/Direct-LED
Number of Pixels (H x V)	1,920 x 1,080 pixels
Brightness (Typ)	2,000 cd/m <sup>2</sup>
Contrast Ratio	1,300:1
Viewing Angle (Horizontal /Vertical)	178°/178°
<b>CONNECTION TERMINAL</b>	
HDMI In	HDMI Type A Connector x 1
DVI-D In	DVI-D 24-pin x 1
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with PC In)
PC In	Mini D-Sub 15-pin x1 (Female)
Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)
DIGITAL LINK	RJ45 x 1 (Shared with LAN)
<b>CONTROL</b>	
Serial In	D-Sub 9-pin x 1, RS-232C Compatible
LAN	RJ45 x 1, 100BASE-TX, Compatible with PLink™ (Shared with DIGITAL LINK)
<b>AUDIO</b>	
Audio Out	Pin Jack (L/R) x 1 set
<b>ELECTRICAL</b>	
Power Requirements	110-127/220-240 V AC, 50/60 Hz
Power Consumption	370 W
Power Off Condition	Approx. 0.3 W
Stand-by Condition	Approx. 0.5 W
Outdoor Mode On	Approx. 41 W
Network Stand-by Mode	Approx. 16 W
<b>MECHANICAL</b>	
Dimensions (W x H x D)	1,162 x 706 x 216 mm (45.8" x 27.8" x 8.5")
Weight	Approx. 47.0 kg (103.6 lbs.)
Protection Glass	Yes
Pitch for Wall-Hanging	VESA Compliant 400 x 400 mm (15.8" x 15.8")
<b>ENVIRONMENTAL</b>	
Direct Sunlight Capability (Measures Against Blackout)	Yes (Built-in air cooling system)
Dust and Water Resistant Level	IP55
Operating Environment*1	Temperature: -20 °C*2 / 0 °C to 50 °C (-4 °F*2 / 32 °F to 122 °F) Humidity : 20 % to 80 % (Non Condensation)

\*1 Don't use in places where the presence of corrosive gases or salt damage area. \*2 When used in Outdoor mode.

**Optional Accessories**

Replacement Air Filter  
**TY-AF60STD**


Early Warning Software  
**ET-SWA100**

\* Available in this winter.

Digital Interface Box  
**ET-YFB100G**



**Terminals**

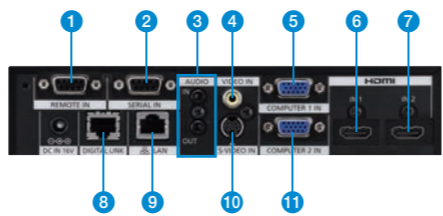

- 1 REMOTE Input
- 2 SERIAL Input
- 3 AUDIO Input/Output
- 4 VIDEO Input
- 5 COMPUTER Input 1
- 6 HDMI Input 1
- 7 HDMI Input 2
- 8 DIGITAL LINK Output
- 9 LAN
- 10 S-VIDEO Input
- 11 COMPUTER Input 2



For more information about Panasonic Professional Display, please visit:  
Professional Display Global Website - [panasonic.net/prodisplays](http://panasonic.net/prodisplays)  
YouTube - [www.youtube.com/PanasonicProDisplay](http://www.youtube.com/PanasonicProDisplay)

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. The PLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Crestron Connected™ is a trademark of Crestron Electronics, Inc. HDBaseT™ is a trademark of the HDBaseT Alliance. All other trademarks are the property of their respective trademark owners. Images on screen are simulated. © 2014 Panasonic Corporation. All rights reserved.

All information included here is valid as of February 2014.

CT14-G01PF-LFX Printed in Japan.



1. High Visibility

2. Durability

3. System Expandability



47"

# » A high-brightness of 2,000 cd/m<sup>2</sup> produces vivid images even under direct sunlight.



Even when sunlight directly strikes the display, the high-brightness of 2,000 cd/m<sup>2</sup> makes images easy to see.



IP55 dust and water resistance makes it ideal for displaying information outdoors.

TH-47LFX60	
Brightness	2,000 cd/m <sup>2</sup>
IP	IP55
Operating Environment	-20 °C* / 0 °C to 50 °C (-4 °F* / 32 °F to 122 °F)
Rotation	Portrait/Landscape
DIGITAL LINK	Yes

\* When used in Outdoor mode.

## High Visibility

### High-Brightness 2,000 cd/m<sup>2</sup> Model with Wide-Viewing-Angle IPS Panel and LED Backlight

Images are clear even in brightly lit places. Full 2,000 cd/m<sup>2</sup> brightness maintains excellent visibility under direct sunlight. This makes the LFX60 ideal for installation in drive-through lanes. And because the brightness isn't affected by external light, information such as menu items and prices remains clear and easy to read.



### The IPS Panel Makes It Easy to Read from Many Positions



The IPS panel displays clear images, and colors appear unchanged even when the image is viewed from an angle top or bottom, right or left. It provides accurate information to many people in a large place such as a public facility.




## Durability

### Forced Air-Cooling System Helps to Prevent Blackouts and Dew Condensation

Outside air is brought into the cabinet to produce an airflow between the front glass and the LCD panel. This suppresses internal temperature rises and prevents blackouts when the display is installed outdoors. It also serves as a countermeasure against condensation.



Direct sunlight raises the LCD panel temperature and causes blackouts.

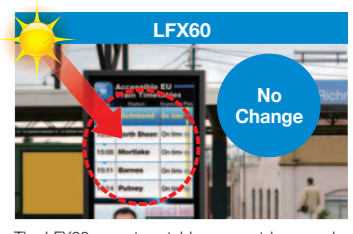

The LFX60 operates stably even outdoors under direct sunlight.


### Highly Durable Display Resists Temperature Changes

Featuring an operating temperature range of -20°C\*1 to 50°C (-4 °F\*1 to 122 °F), performance remains unchanged even in cold and hot climates.

\*1: When used in Outdoor mode.

### Aluminum Cabinet and Tempered Glass

The aluminum cabinet strongly resists corrosion. In addition, tempered glass ensures rugged strength against impacts.

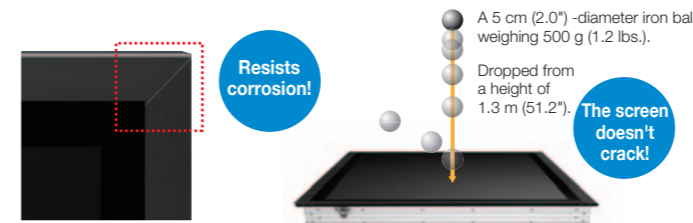

### Dust and Water Resistance Performance – Ideal for Outdoor Installation

IP level dust and water resistant performance provides tough durability in harsh conditions.

Dust Resistance		Water Resistance	
Level	Degree of Protection	Level	Degree of Protection
5	Protected against dust limited ingress (no harmful deposit)	5	Protected against water jet.


\* What is IP?: This denotes the degree of dust and water resistance. IP is an abbreviation of the international standard Ingress Protection. Defined in the IEC60529 international standard.

## System Expandability

### DIGITAL LINK for Transmission of Video, Audio and Control Signals for up to 100 m [328.1 ft] with a Single LAN Cable

Only a single LAN cable\*1 is required to transmit uncompressed HD video, audio and control signals for a distance of up to 100 m [328.1 ft]. This enables indoor installation of the PC and other devices connected to the display at an outdoor location in order to protect the PC and devices from rain and dust. Since only one cable needs to be connected between the PC and panel, cable routing work is quick and easy. Because a control signal can also be sent simultaneously, it is easy to upgrade the system by combining it with the optional ET-YFB100G Digital Interface Box.

\*1: Use an STP cable of CAT5e or higher. \*2: WUXGA (1,920 × 1,200 pixels) compatible.

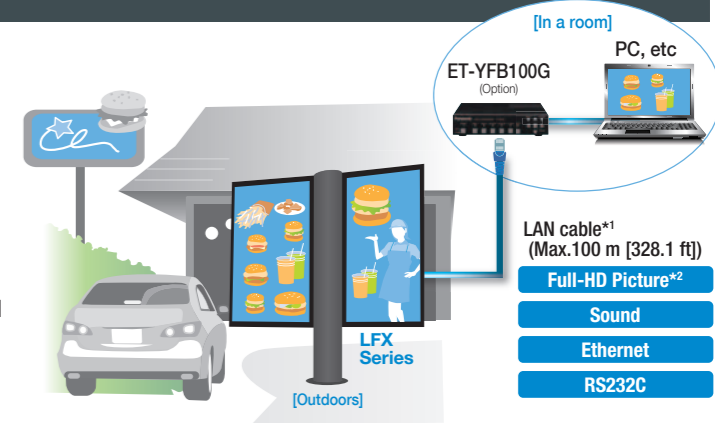

**DIGITAL LINK** is an original function added to HDBaseT™ technology. Used together with the ET-YFB100G Digital Interface Box, or other compatible equipment, the installation of this display is easier than ever without any need for external receivers.

See the following URL for information on other-brand peripheral equipment for which operation was confirmed.

<http://panasonic.net/prodisplays/support/digitallink.html>

\* HDBaseT™ is a trademark of the HDBaseT Alliance.

\* In case of running for a long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.  
\* Depending on the usage environment, the filter and inside surface of the protective glass may require regular cleaning.

