

The most affordable
Neets control system

A smarter, budget-friendly
alternative to remote controls

Four configurable
control buttons

Turn projector on and select
source with one button

LED status indication


Automatic timer functions
A build-in timer can be set
to switch a projector or a
screen off after a period of
inactivity

Auto shut down when
no motion is detected

Easy system configuration
Quick access by front-panel
USB connector

Fits in standard
wall outlet box
(DK or EU)

Control both
projector and
external devices

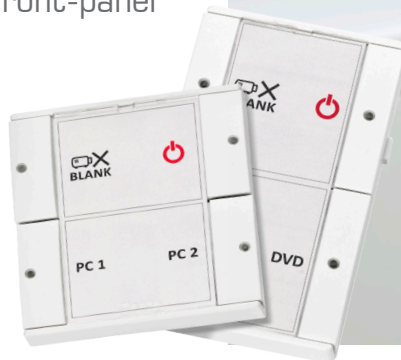

End frustrations with a smarter solution

Until now, many companies and institutions have chosen not to specify a permanent AV control system due high costs for hardware, configuration and installation.

Presentors often have to rely on many different remote controls - often misplaced or fail to function because of damage or dead batteries.

Also, when there is used different projector models installed in multiple classrooms, the different IR control button layouts is a big inconvenience. In addition, projector IR remotes cannot control external functions

such as PIR motion sensing or external amplifier mute.

BraVo eliminates these frustrations with an intelligent and affordable alternative. The control panel fits neatly in standard outlet boxes, and wiring takes few minutes using Euroblock plug-in connectors.

Configuration is simple and intuitive using Neets' Project Editor software, with a driver database of more than 2000 AV devices. The functions for each room can be downloaded into BraVo in seconds through the front USB port.


For the end user, BraVo offers flexible control with the utmost simplicity of operation. One button can be configured to turn the projector on and select the desired computer.

An internal timer can be configured to shut down a projector or screen after a specified period of inactivity, and with an external PIR sensor, you can set a timer to power off, when no motion is detected for a specific time.

In every respect, Neets Control - BraVo is a solution that's "just smarter."

Connections key:

- 1** I/O port
- 2** RS-232 or IR port
- 3** 12 V power supply
- 4** Front USB port for easy install or configuration in wall or trunking system

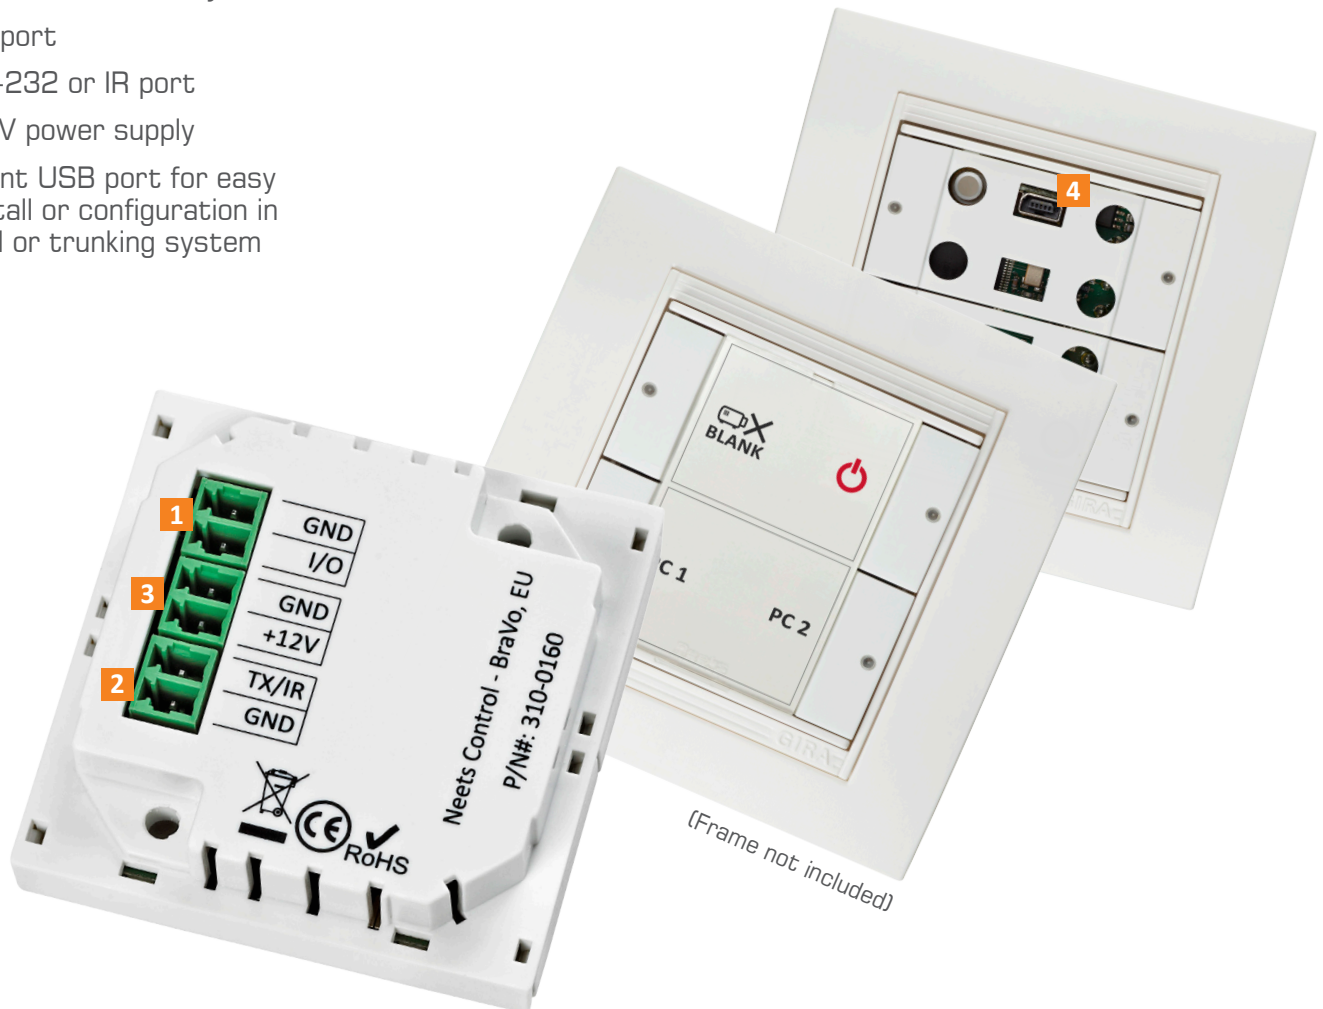

Technical specifications:

Communication ports:
 1 x RS-232 or IR (Tx only)
 1 x USB
 1 x Input/Output:
 Input:
 Sense Low: <1 VDC
 Sense High: >4 VDC
 Output:
 Type: Open drain
 Max Voltage: 24 VDC
 Max Current: 0.5 A

Dimensions (EU):
 Width: 55 mm
 Height: 55 mm
 Depth: 17 mm

Dimensions (DK):
 Width: 72 mm
 Height: 45 mm
 Depth: 17 mm

Front panel colours
 White

Power supply:
 12 V DC 100 mA

Conformity:
 Approval: CE
 EN 55022
 EN 55024

item numbers:
 310-0260:
 Neets Control - BraVo,
 DK - Polar white

310-0160:
 Neets Control - BraVo,
 EU - Polar white