








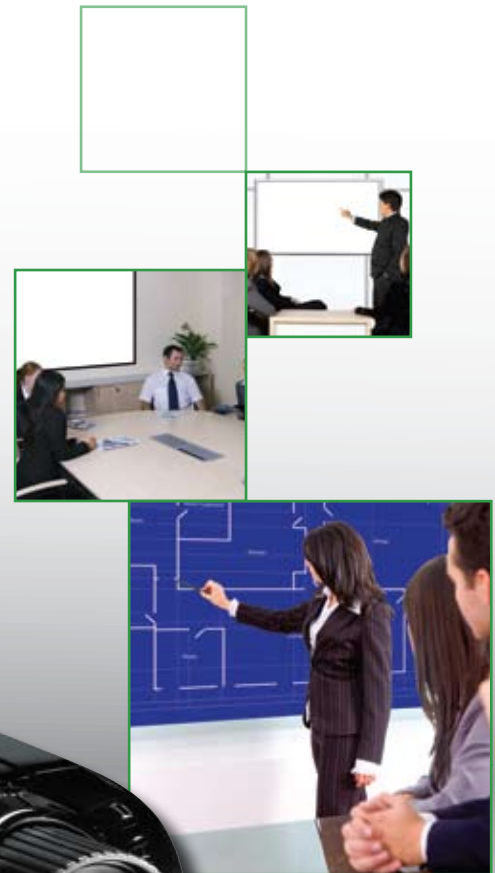


EW762 DLP® Projector

-  Bright & Detailed projection
– 4000 ANSI Lumens / 3000:1 Contrast
-  Widescreen presentations and HD entertainment
-  Digital and Analogue connectivity includes:
HDMI, dual VGA
-  Long lasting projection – 4000Hr lamp life
-  Crestron RoomView® – RJ45 control and monitoring
-  Portable – carry bag provided for easy transportation
-  8W speaker – all-in-one multimedia set-up
-  Environmentally friendly design <1W standby mode
-  Filter-free design – virtually no maintenance

Bringing **Widescreen** projection to life



The exceptionally bright EW762 with 120Hz 3D Ready technology is perfect for projecting in boardrooms, lecture theatres or meeting rooms. Installed or on the move, the versatile EW762 incorporates networking capabilities, extensive connectivity and powerful 8W speaker.

The environmentally friendly EW762 has energy saving features including <1W standby mode and auto power off saving you both time and money. Our unique Optoma Colour and Imager guarantees, combined with an astonishing 4000hr lamp life ensure hassle-free, long-lasting projection for years to come.

3D TECHNOLOGY

Using the inherent speed of DLP technology, The Optoma EW762 can output video and images at an astonishing rate of 120Hz, allowing you to show full screen, full colour, stereoscopic 3D. The 3D effect is generated by splitting this signal into two standard video streams, one for each eye. Using DLP® Link™ technology, the 3D glasses synchronise with the image on screen to filter each stream to the correct eye. Your brain then combines the two streams to make them jump into life.

The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems. Support for 3D TV broadcast systems, (SKY in the UK), Blu-ray 3D™ and 3D games from the Sony® PS3 or Microsoft® Xbox 360 will require the Optoma 3D-XL that is available separately. See website for updates.


3D
Ready

3D-XL
Ready

CRESTRON ROOMVIEW® - NETWORK CONTROL

RoomView® software provides a custom configurable interface to monitor, manage and control every device in every room remotely from any computer.

- Manage up to 250 projectors at the same time (via master PC)
- Control and alter the projector settings using a simple web browser page, including OSD menu control.
- Set up email alerts and warning messages
- Ideal for large installations in both in the educational and business environments

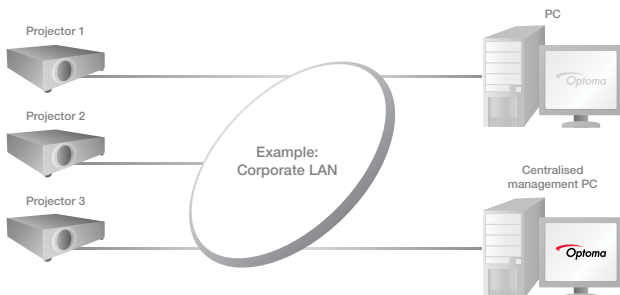

TRUE WXGA RESOLUTION

The EW762 is the perfect companion for widescreen laptops. Your presentations will appear as sharp and detailed as they do on your widescreen laptop in WXGA (1280 x 800). WXGA resolution gives 30% more pixels than XGA



XGA



WXGA

Control

The extensive RS232 command set makes it simple and easy to control the EW762 with any control system.

AMX Compatibility – Dynamic Discovery Protocol is incorporated into the EW762. This feature allows for easy installation with AMX control systems.



CRESTRON
RoomView
connected

Download Crestron RoomView® Express software from:
www.crestron.com/getroomview

EXTENSIVE CONNECTIVITY

This native WXGA projector accepts a wide variety of computer and video input signals.

Connectivity includes: HDMI, dual VGA (Wireless/SCART/Component via adaptor), S-Video, Composite, VGA-Out, RS232, RJ45 and +12V trigger.

Three selectable audio inputs for individual PC and video connections enable the EW762 to function as an audio switcher and volume controller, thereby eliminating complicated and costly additional audio hardware and cabling.

AUDIO CAPABILITY

Built-in 8W speaker offers excellent audio support. The EW762 is easy to set up without the need for costly external speakers.

CLEAR, FOCUSED IMAGES

DarkChip3™ technology from Texas Instruments produces a stunning 3000:1 contrast ratio for pin sharp graphics and crystal clear text. Crisper whites, ultra-rich blacks make images come alive and text easier to read - ideal for business and education presentations.



1000:1 contrast ratio

3000:1 contrast ratio

‡Simulated Image

AMAZING COLOURS

The EW762 incorporates BrilliantColor™ technology to produce stunningly bright images with perfectly balanced life-like colours.

COLOUR AND IMAGER GUARANTEE

Bright colours and fantastic image quality are guaranteed for an amazing 5 years after purchase - giving piece of mind that the technology inside the Optoma EW762 projector won't fade or degrade.



VIRTUALLY MAINTENANCE FREE = LOWER TOTAL COST OF OWNERSHIP

EW762 provides lower cost of ownership, longer life and improved reliability. The filter-free projector design does not require regular filter cleaning or filter replacement, saving you time and money.



EXTRA FEATURES

- 6 preset display modes
- Security bar and password protection for added security
- Easy to use remote with laser pointer, mouse control and direct source selecting
- Direct power on
- Customised start-up logo
- +12v Trigger - electric screen control

ENVIRONMENTALLY FRIENDLY

The EW762 incorporates energy saving features to conserve power and extend the lamp life:



To achieve the maximum 4000hrs² lamp life time the projector should be operating in ECO mode and the shut down timer should be enabled to automatically switch off the projector if it is accidentally left on when no longer required. Enabling the <1W Standby mode will ensure the minimum energy consumption when the projector is not being used.



It takes less than 10 seconds for the projector to power up and shutdown, saving both time and energy.



We know that improving our products is the best way to reduce our impact on the environment. That's why at Optoma, we design our products to have a long usable life, use fewer materials, ship with the minimum packaging and be free of all possible toxic substances. Naturally, energy efficiency and being recyclable are built in at the design stage. With each new product, we strive towards minimising our environmental impact. For full details of Optoma Project Green please visit our website.


EW762 SPECIFICATIONS

Native Resolution	WXGA (1280 x 800)
Compressed Resolution	UXGA (1600 x 1200)
Brightness - BRIGHT mode ¹	4000 ANSI Lumens
Contrast	3000:1
Noise Level	29dB
Lamp Life ²	4000/3000 (ECO/BRIGHT mode)
Projection Lens	F/2.4~2.66; f=18.2~21.8mm, 1.2x Manual Zoom
Throw Ratio	1.28- 1.54:1 (Projection Distance:Image Width)
Projection Distance	1.2 ~ 10m
Image Size	0.92 ~ 9.19m (36.3" ~ 362") Diagonal 16:10
Display Technology	0.65" WXGA DLP [®] Technology by Texas Instruments
Weight / Dimensions (W x D x H)	2.9 kg / 324 x 234 x 97mm
Remote Control	Full function remote with laser pointer, mouse control and direct source selecting
INPUTS	HDMI (HDCP) - audio supported 2 x 15 Pin D-Sub VGA (Wireless/SCART/Component via adaptor) S-Video 4 Pin Mini Din Composite RCA 3 x 3.5mm Audio Mini Jack (Selectable via OSD) USB (remote mouse)
CONTROL	RS232 - 9 Pin D-sub RJ45
OUTPUT	15 Pin D-Sub VGA 3.5mm Audio Mini Jack +12v Trigger
Audio	8W Speaker
Aspect Ratio	16:10 Native, 16:9 & 4:3 Compatible
Keystone Correction	± 20° Horizontal
Offset	112.5%
On Screen Display	19 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish, Farsi & Arabic
Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i/1080p
Uniformity	85%
Displayable Colours	1.07 Billion
Horizontal Scan Rate	15 - 91KHz
Vertical Scan Rate	24 - 120Hz
Power Supply	100 - 240V, 50 - 60Hz
Power Consumption	372W BRIGHT mode < 1W Standby mode 314W ECO mode < 1W Standby mode
Operating Conditions	Operating: 5 - 40°C, 85% Humidity (Max), 3000m Altitude (Max)
Security	Security Bar, Kensington Lock Port, Password Protection
Standard Accessories	Soft Carry Bag, Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card
Optional Accessories	Wireless Dongle, SCART & Component adapter, Ceiling Mount
RoHS	Compliant
Projector / Lamp Warranty	Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details
Colour Guarantee ³	5 Years
Imager Guarantee ⁴	5 Years
3D Support	120Hz frame sequential 3D for resolutions up to 720P, 60Hz field sequential 3D for resolutions up to 480i
3D Viewing	Requires Optoma DLP [®] Link [™] active shutter glasses - sold separately
3D Compatibility	The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems. Support for 3D TV broadcast systems, (SKY in the UK), Blu-ray 3D [™] and 3D games from the Sony [®] PS3 or Microsoft [®] Xbox 360 will require the Optoma 3D-XL that is available separately.

EASY TO USE REMOTE CONTROL

EW762 Remote Control

- 1 Laser
- 2 Remote Mouse
- 3 Page Up/Down control
- 4 Vertical Keystone Correction
- 5 Volume Control
- 6 Brightness Adjustment
- 7 Freeze
- 8 AV Mute
- 9 Direct Input Source Selection

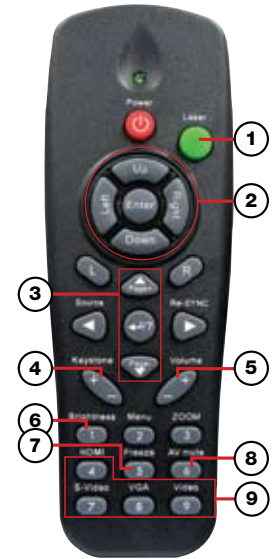

EW762 Connections

- 10 RJ45
- 11 USB (Remote Mouse)
- 12 HDMI (audio supported)
- 13 VGA 1- Wireless & Component
- 14 VGA Out
- 15 S-Video
- 16 Composite Video
- 17 Audio Out
- 18 +12v Trigger
- 19 VGA 2- SCART & Component
- 20 RS232 - 9 Pin
- 21 Audio In (S-Video & Composite)
- 22 Audio In (VGA 2)
- 23 Audio In (VGA 1)
- 24 Kensington[™] Lock
- 25 Security Bar

Exceptional Connectivity / Multiple Terminals



Easy to use remote with buttons to change the input sources



EW762 Projection Distance 1.2 - 10m (16:10 Aspect Ratio)

Projection Distance (m)	Max. Horizontal Image Size (m)	Min. Horizontal Image Size (m)	Max. Vertical Image Size (m)	Min. Vertical Image Size (m)	Max Diagonal Image Size (m)	Max Diagonal Image Size (inch)	Max. Image Offset (m)
1.20	0.94	0.78	0.59	0.49	1.11	36.27	0.66
2.00	1.56	1.30	0.98	0.81	1.84	72.54	1.10
3.00	2.34	1.95	1.46	1.22	2.76	108.81	1.65
4.00	3.13	2.60	1.95	1.63	3.69	145.08	2.20
5.00	3.91	3.26	2.44	2.03	4.61	181.36	2.75
6.00	4.69	3.91	2.93	2.44	5.53	217.63	3.30
7.00	5.47	4.56	3.42	2.85	6.45	253.90	3.85
8.00	6.25	5.21	3.91	3.26	7.37	290.17	4.39
9.00	7.03	5.86	4.39	3.66	8.29	326.44	4.94
10.00	7.81	6.51	4.88	4.07	9.21	362.71	5.49

For guide purposes only

EW762 is capable of 16:9 aspect ratio projection. When projecting a 16:9 image the image sizes, screen height and offset information will differ from the above.

Optoma Europe Ltd.
42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ

www.optoma.co.uk



¹Brightness and lamp lifetime will vary depending on selected projector mode, environmental conditions and usage. As is common with all lamp based projectors, brightness will decrease over the lamp lifetime. ²Typical lamp life achieved through testing. Will vary according to operational use and environmental conditions. ³Optoma guarantees that in normal use, Optoma DLP[®] colour quality will be indistinguishable from when new. Exclusions: (a) Guarantee is voided if the projector is subject to damage through misuse. (b) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is excessive (c) Guarantee will not apply if lamp brightness is below 50% due to wear or if the projector is not working due to other faults. (d) Over time worn lamps within all projector types will show a slight colour variance. ⁴Optoma guarantees that in normal use, the DLP[®] imager will retain image quality for at least 5 years and provide consistent pixel performance. Exclusions: (a) Guarantee is voided if the projector is subject to damage through misuse. (b) Guarantee may be void in industrial or commercial environments where dust or smoke is excessive. Copyright © 2010, Optoma Europe Ltd. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Crestron[®], the Crestron and RoomView[®] logo are registered trademarks of Crestron Electronics, Inc. Errors and omissions excepted, all specifications are subject to change without notice. DLP[®], BrilliantColor[™] and the DLP logo are registered trademarks of Texas Instruments.