



# PICO POCKET PROJECTOR USER'S MANUAL



## EYE SAFETY WARNINGS

- Avoid staring/facing directly into the projector beam at all times. Keep your back to the beam as much as possible.
- A stick or laser pointer is recommended to avoid the need for the user to enter the beam.
- When projector is used in a classroom, adequately supervise students when they are asked to point out something on the screen.
- In order to minimize power, use room blinds to reduce ambient light levels.

## A.2.9.31 GLOSS OF HOUSING OF PERIPHERAL DEVICES (15<sup>TH</sup> / 22 MEETING AG1 EK1):

The requirements for the gloss of housing apply to peripheral devices used at the visual display workplace according to BildscharbV. Peripheral devices intended for use outside the visual display workplace can receive a GS-Mark if the scope is indicated in the User's Manual as well as the certificate.

That means the following wording is possible in situations where the use within the field of view is not intended and where sufficient hints are given in the User's Manual for the avoidance of such situations to ensure that display work is not affected.

Wording in the certificate: "This device is not intended for use in the direct field of view at visual display workplaces. To avoid incomming reflexions at visual display workplaces this device must not be placed in the direct field of view."

## REGULATION & SAFETY NOTICES

This appendix lists the general notices of your Projector.

### FCC notice

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

### Notice: Shielded cables

All connections to other computing devices must be made using shielded cables to maintain compliance with FCC regulations.

### Caution

Changes or modifications not expressly approved by the manufacturer could void the user's authority, which is granted by the Federal Communications Commission, to operate this device.

### Operation conditions

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

### Notice: Canadian users

This Class B digital apparatus complies with Canadian ICES-003.

### Remarque à l'intention des utilisateurs canadiens

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

### Declaration of Conformity for EU countries

- EMC Directive 2004/108/EC (including amendments)
- Low Voltage Directive 2006/95/EC
- R & TTE Directive 1999/5/EC (if product has RF function)

## IMPORTANT SAFETY INSTRUCTION

1. Do not block any ventilation openings. To ensure reliable operation of the projector and to protect from over heating, it is recommended to install the projector in a location that does not block ventilation. As an example, do not place the projector on a crowded coffee table, sofa, bed, etc. Do not put the projector in an enclosure such as a book case or a cabinet that restricts air flow.
2. Do not use the projector near water or moisture. To reduce the risk of fire and/or electric shock, do not expose the projector to rain or moisture.
3. Do not install near heat sources such as radiators, heaters, stoves or any other apparatus such as amplifiers that emits heat.
4. Do not use the projector in direct sunlight.
5. Do not use near any appliance generating a strong magnetic field.
6. Do not use the projector in areas susceptible to excessive dust and dirt.
7. Turn off the product before cleaning.
8. Turn off the product before removing the battery.
9. Disconnect the battery if the product is not being used for a long period of time.
10. Ensure that the ambient room temperature is within 5- 35°C.
11. Relative Humidity is 5 - 35°C, 80% (Max.), non-condensing.
12. Do not expose the battery to temperatures above +60°C (+140°F)
13. New or idle batteries can have short-term reduced capacity. Fully charge the battery before initial use.
14. Do not put the battery into your mouth.
15. Do not let the battery contacts touch another metal object.
16. Do not drop, throw or try to bend your product.
17. May explode if disposed of in fire.
18. Clean only with dry cloth.
19. Only use attachments/accessories specified by the manufacturer.
20. Do not use the unit if it has been physically damaged or abused. Physical damage/abuse would be (but not limited to):
  - Unit has been dropped.
  - Charger or plug has been damaged.
  - Liquid has been spilled on to the projector.
  - Projector has been exposed to rain or moisture.
  - Something has fallen in the projector or something is loose inside.
 Do not attempt to service the unit yourself. Opening or removing covers may expose you to dangerous voltages or other hazards. Please contact your local reseller or service center before you send the unit for repair.
21. Do not let objects or liquids enter the projector. They may touch dangerous voltage points and short out parts that could result in fire or electric shock.
22. See projector enclosure for safety related markings.
23. The unit should only be repaired by appropriate service personnel.
24. Do not touch the projector for a long time while the projector is used.
25. CAUTION: Risk of Explosion if Battery is replaced by an Incorrect Type.
26. Dispose of Used Batteries According to the Instructions.


## DISPOSAL OF OLD ELECTRICAL & ELECTRONIC EQUIPMENT

(Applicable throughout the European Union and other European countries with separate collection programs)

This symbol found on your product or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resources.



This symbol is only valid in the European Union. If you wish to discard this product, please contact your local authorities or dealer and ask for the correct method of disposal.

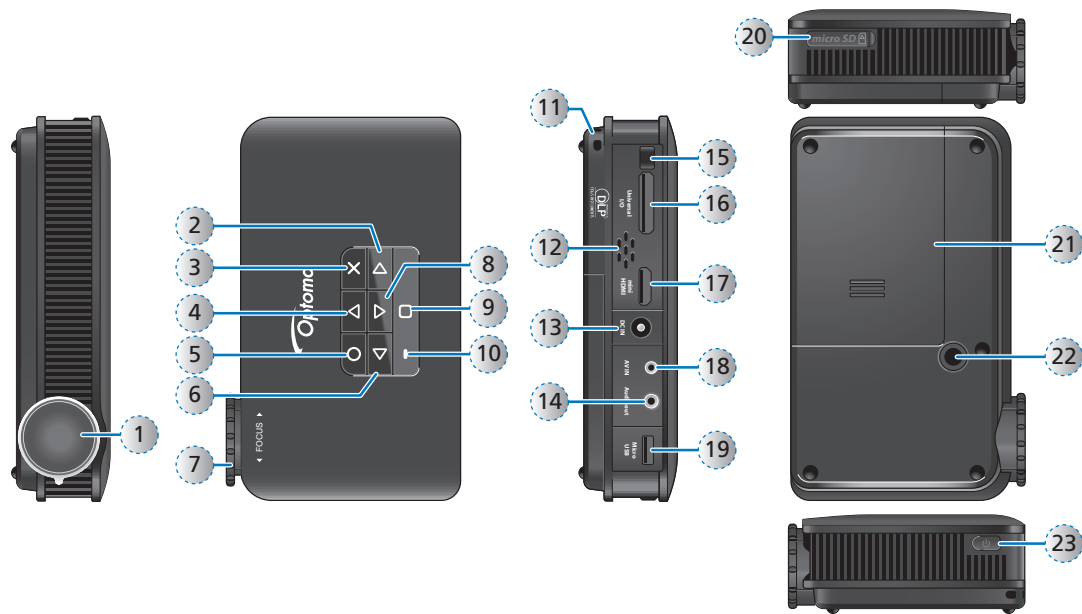


- |                            |                                     |
|----------------------------|-------------------------------------|
| 1. Lens                    | 13. DC Input                        |
| 2. Right Button (▷)        | 14. Audio Out Connector             |
| 3. Cancel / ESC Button (×) | 15. IR Receiver                     |
| 4. Up Button (△)           | 16. Universal I/O Connector         |
| 5. OK Button (○)           | 17. Mini HDMI Connector             |
| 6. Left Button (◁)         | 18. AV Input Connector              |
| 7. Focus Dial              | 19. Micro USB Port                  |
| 8. Down Button (▽)         | 20. MicroSD Card Slot               |
| 9. Home Button (◻)         | 21. Battery Cover                   |
| 10. LED Indicator          | 22. Screw Hole for Tripod Converter |
| 11. Lanyard                | 23. Power Button                    |
| 12. Speaker                |                                     |

### Remote Control

1. Power Button	9. Bright Button
2. Up Button (△)	10. Cancel / ESC Button (×)
3. OK Button (○)	11. Right Button (▷)
4. Left Button (◁)	12. Video Button
5. Down Button (▽)	
6. Home Button (◻)	
7. VGA Button	
8. HDMI Button	

<Note>  
Items 2~6 and 8 are also function buttons. Functions vary depending on the current mode.

## PACKAGE OVERVIEW

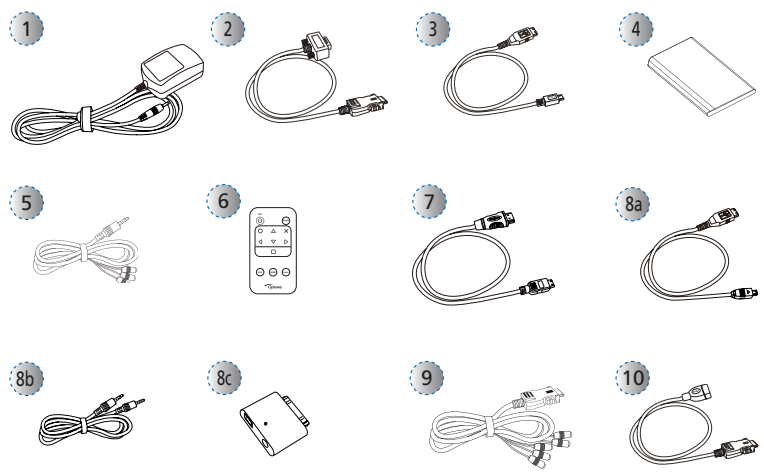


- ### Standard Accessory
- Power adaptor with AC plug
  - VGA cable
  - USB to micro USB cable
  - Battery
  - AV cable
  - Remote control

- ### Optional Accessory
- Mini HDMI cable
  - iPod connection kit
    - USB cable for iPod connector
    - iPod cable
    - iPod connector
  - Component cable
  - Universal I/O to USB female cable




<Note>  
The standard accessories may vary in each region due to different applications.

<Note>  
The inclusive power plug head varies per region.





## INSTALL THE BATTERY

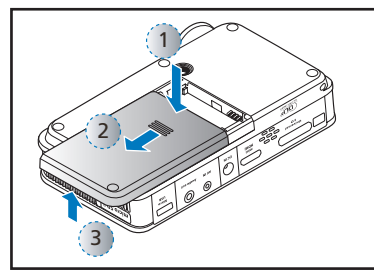


- Remove the battery cover. (①~③)
- Align the battery contacts with the contacts in the battery compartment. (④)
- Push the battery to secure it in place. (⑤)
- Slide the battery cover back into place. (⑥)

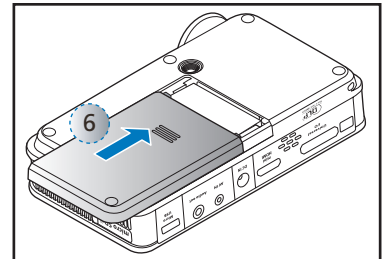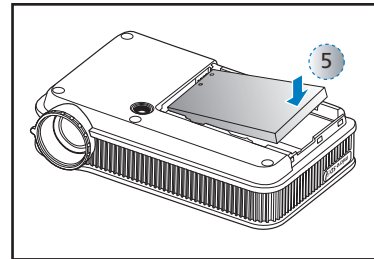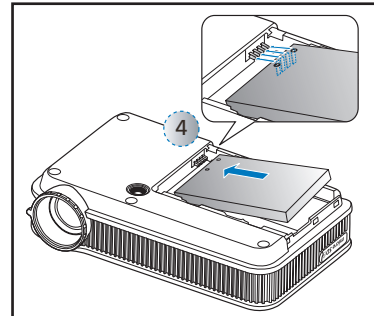

## CHARGE THE BATTERY

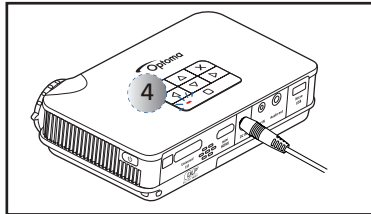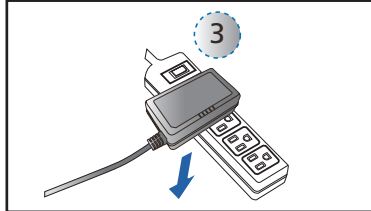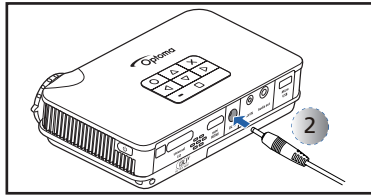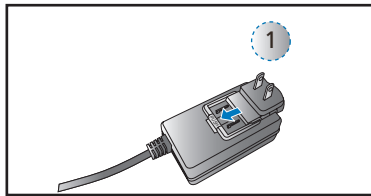


When the low battery icon (  ) is displayed on the projected screen, replace the battery immediately or connect the power adapter to charge the battery.

1. Make sure the projector is turned off.
2. Insert the plug. (①)
3. Connect the power adapter. (②~③)
4. During charging, the LED indicator lights red. (④)
5. The LED indicator turns green when the battery is fully charged. This process may take up to 2.5 hours.

### <Note>



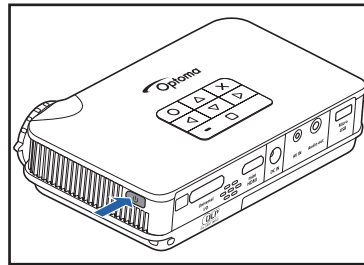


1. Bright mode is only available when the power adapter is connected.
2. The battery will not charge while the projector is operating.
3. For LED indicator information, see page 23.
4. After the projector is turned off, the battery may not start charging right away due to over temperature protection. The projector will automatically start charging once it cools off.
5. The battery has a lifespan and ages every time it is charged and discharged. It will gradually lose its charging capability as it ages. Replace the battery at the end of its lifespan.

## POWER ON / OFF









Press the Power button to turn the projector on or off.

For first time use, the Language screen appears.

1. Highlight the desired language. (     )
2. Select the item. (  )
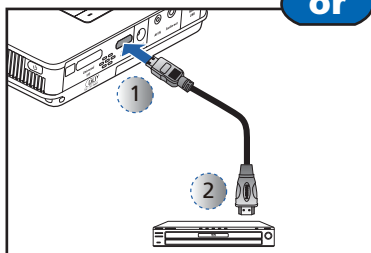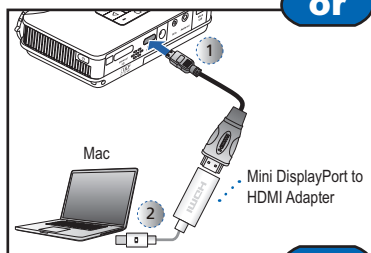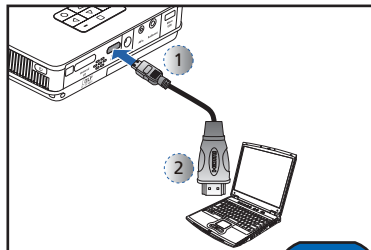
## CONNECT INPUT SOURCE - HDMI








1. Connect the HDMI device using an appropriate cable. (①~②)  
 Insert the universal connector with the arrow mark facing up.
2. After powering on the projector, the projector automatically detects the input source. Otherwise, press  to open the Input menu. (See page 19)
3. Press  to select HDMI.

### <Note>

- HDMI cable is not included in the package.
- Mini DisplayPort to HDMI Adapter (optional) is sold at Apple stores.
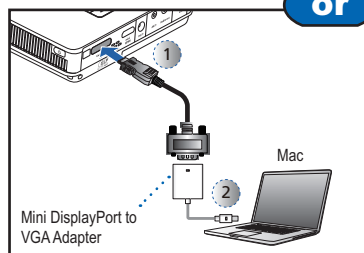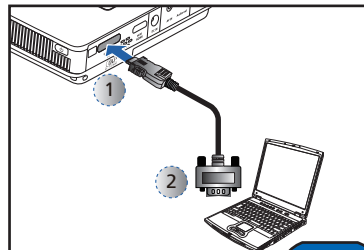
## CONNECT INPUT SOURCE - VGA




1. Connect the VGA device using the appropriate cable. (①~②)  
 Insert the universal connector with the arrow mark facing up.
2. After powering on the projector, the projector automatically detects the input source. Otherwise, press  to open the Input menu. (See page 19)
3. Press  to select VGA.


### <Note>

- Mini DisplayPort to VGA Adapter (optional) is sold at Apple stores.



## CONNECT INPUT SOURCE - VIDEO IN / AUDIO IN

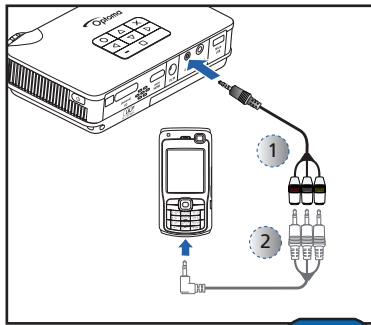

or

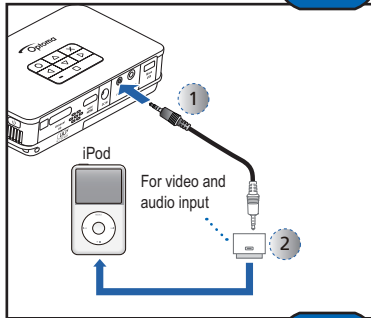

or

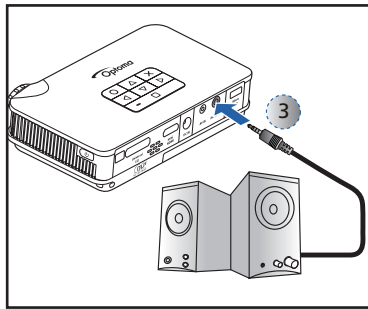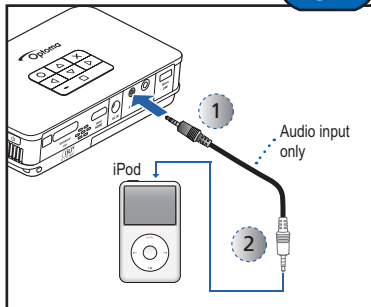


1. Connect the AV device using the appropriate cable. (①~②)
2. Connect external speakers to the audio out connector of the projector. (③)
2. After powering on the projector, the projector automatically detects the input source. Otherwise, press  $\triangleleft$  to open the Input menu. (See page 19)
3. Press  $\bigcirc$  to select Video.

<Note>

1. All other brand and product names are trademarks or registered trademarks of their respective companies.
2. The cables connecting the video output devices are not supplied, please contact the device vendor.
3. iPod/iPod nano/iPod touch/iPhone/iPod classic (version 5 and above)
4. Designed for iPod/iPhone/Mobile phone/PMP with TV out functions. Using with devices with audio signal voltage > 0.3Vrms is not recommended.
5. The optional USB cable for iPod Connector is used to charge the iPod device using a computer.

## INSERT DATA SOURCE - MICROSD CARD

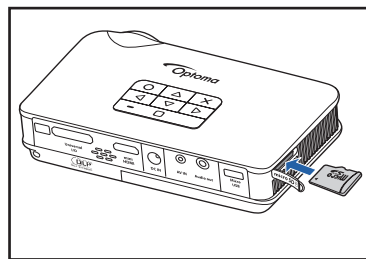


By default, the projector displays from the internal memory. However if a microSD card is inserted, the projector reads from the microSD card first. Insert a microSD card into the slot with the gold contacts facing down. To remove the microSD card, push the card to eject it from the slot.

<Note>

- Do not remove the microSD card while the projector is projecting image from the card. This can cause data loss or damage the card.
- Supports microSD card size up to 32GB.
- The microSD card is not included in the package.
- MicroSD format on Windows system must be in FAT32 format.

## INSERT DATA SOURCE - USB (EXTERNAL SOURCE)

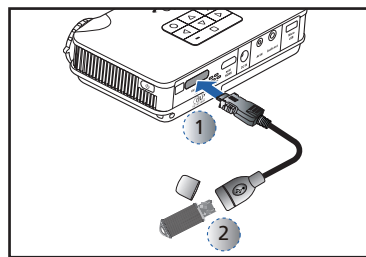


The projector reads data from the USB flash drive first if a USB flash drive is inserted.

Connect the USB flash drive to the projector using a Universal I/O to USB female cable. (①~②)

<Note>

1. USB cable (for flash drive) is not included in the package.
2. The projector only supports USB flash drive (up to 5V/150mA) with FAT32 format.
3. USB hard disk drive is not supported.

## CONNECT COMPUTER FOR DATA TRANSFER

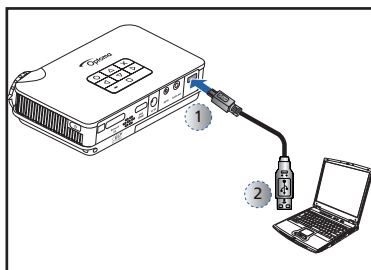

You can transfer data to the projector internal memory or the microSD card.

Connect a laptop or PC using the supplied USB to micro USB cable. See "How to Transfer Data via USB" on page .

<Note>

The laptop/PC can only detect the input source when the projector is switched on. The projection will stop when this connection is made.

## USE A TRIPOD STAND



Screw a standard tripod into the screw hole on the projector.



<Note>

The tripod is an optional accessory.

## ADJUST THE PROJECTED IMAGE


Image Size Chart

Projection Distance (A)		Screen Size - Width (B)		Screen Size - Height (C)		Screen Diagonal (D)	
Meter	inch	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)
0.2	7.87	110	4.3	62.7	2.5	127	5
0.4	15.75	221	8.7	125.4	4.9	254	10
0.6	23.62	331	13.0	188.1	7.4	381	15
0.8	31.5	448	17.4	250.8	9.9	508	20
2.4	94.49	1325	52.2	752.3	29.6	1524	60
4.8	189	2651	104.4	1504.5	59.2	3048	120
5.98	235	3321	130.8	1867	73.5	3810	150

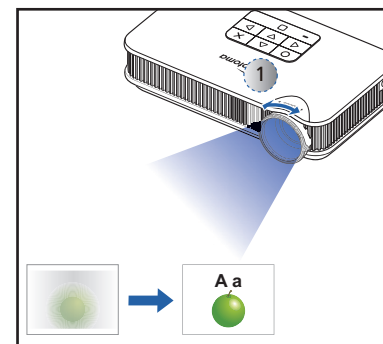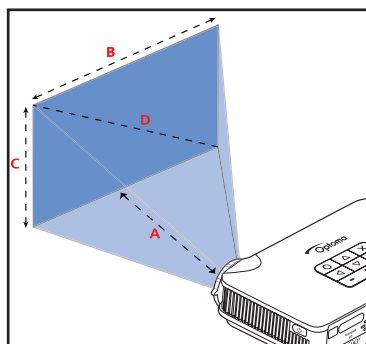

Adjust the focus (①) until the image is clear.

# How to Use the Menu

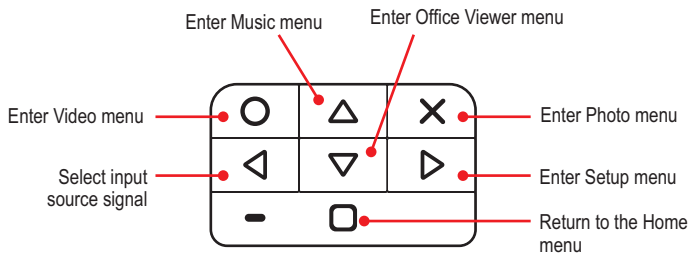


- Press the corresponding button of the desired option.
- Press X to go back a previous screen.

**<Note>**


A button guide appears on the lower left corner of most screens (see below). The guide varies depending on the current mode. Press the corresponding button to select the option or operation.

## Home menu

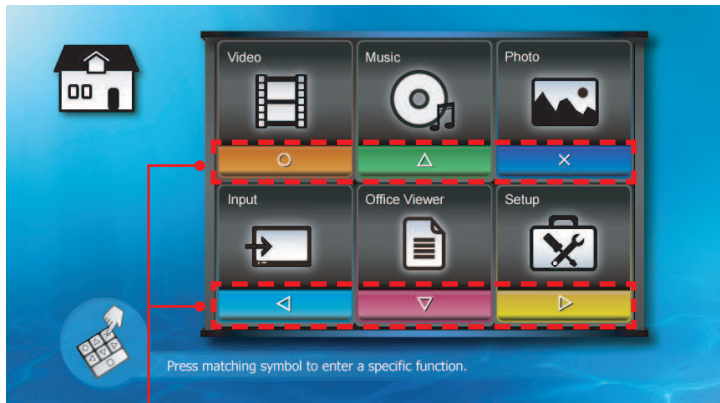

Press the corresponding button of the menu item that you want to access. For example, to access Video, press O.

## Submenu

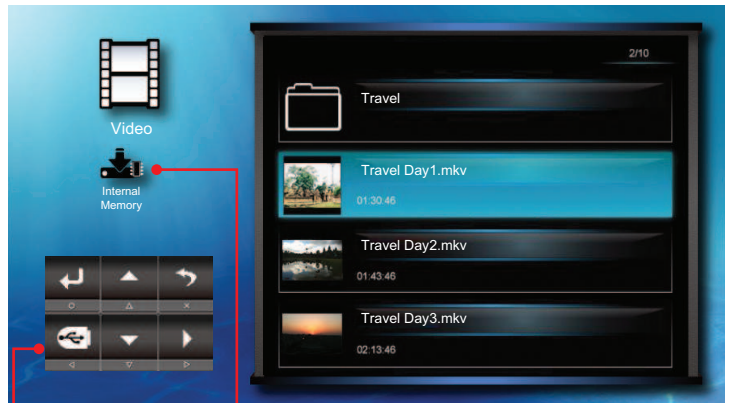

**Data source icon**


The projector reads from memory sources in the following order: External source (USB) » microSD card » internal memory.

- External source      Internal memory
- MicroSD card


**Button guide**

Press the corresponding button to select the option or operation.

## Submenu Items

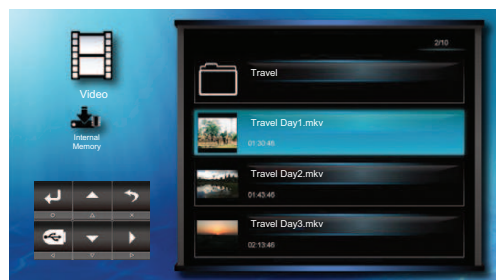


Video menu

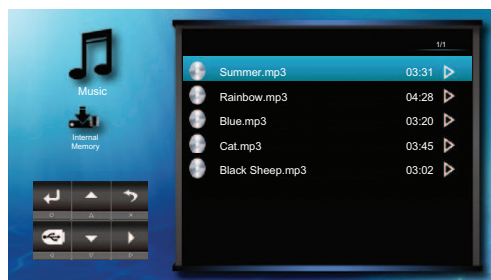

Music menu



Photo menu

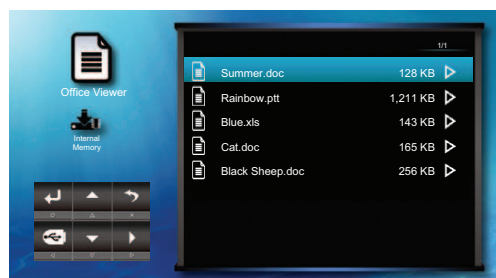

Office Viewer menu



Input menu




Setup menu

## Playing Videos from the Internal Memory, MicroSD Card, or External Source


If an external source (USB) is inserted, the external memory is read first. If you want to read data from the microSD card or internal memory, press **<** in the appropriate screen to change the data source. See steps below.

### 1. Select "Video"





### 2. Select Data Source


The screen, the source icon on the button guide, and the sequence in which screens appear vary depending on the available data source. If the external source or microSD card is not inserted, its screen is skipped when **<** is pressed and the source icon on the button guide is not shown.

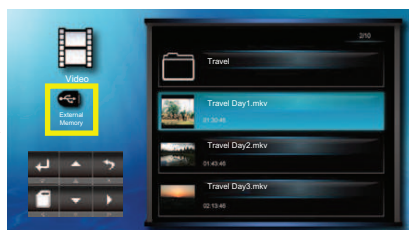


Change data source

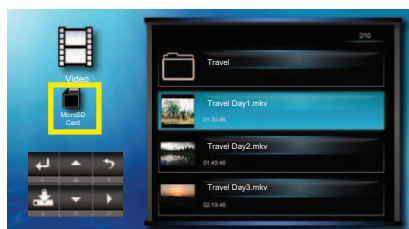

Change data source

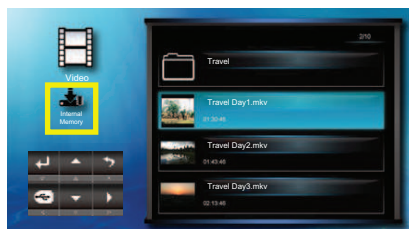

Change data source





### 3. Select Video File



**<Note>**  
The displayed screen may vary depending on the selected data source on the previous step.


### 4. Playback File

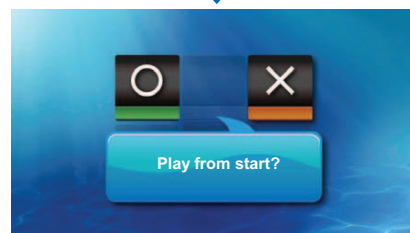

Yes  
Playback from start

No



Video Playback mode (see page 8)

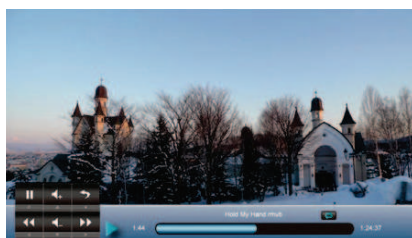

Playback from last point

# HOW TO PLAY VIDEOS - VIDEO PLAYBACK MODE

<Note>  
The button guide disappears when the keypad is not used for 3 seconds.  
To display the button guide, press any key except x or o.

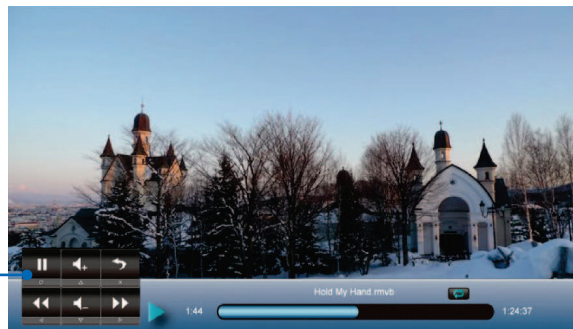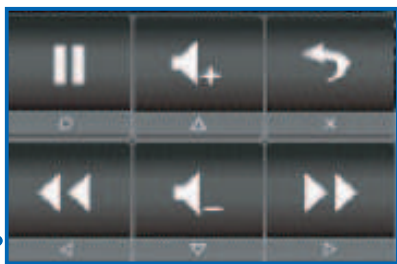

Adjust volume		Rewind	
Pause/Play		Back to previous screen	
Fast forward		Return to Home menu	


Repeat Icons

- Repeat all
- Repeat one
- Repeat off


<Note>  
To change repeat settings, see Video Settings below.

## VIDEO SETTINGS


### 1. Select "Setup"



### 2. Select "Video Setting"



### 3. Adjust Settings

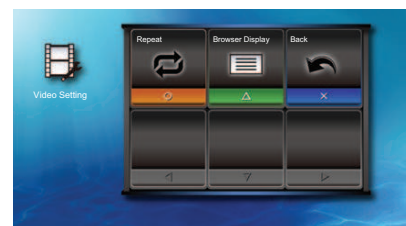

- Repeat all
- Repeat one
- Repeat off
- Browser display: list view
- Browser display: thumbnail view

## COMPATIBILITY: VIDEOS

### Compatible Video Format

File Format	Video Decoder	Audio or Speech Decoder	File Format	Video Decoder	Audio or Speech Decoder	File Format	Video Decoder	Audio or Speech Decoder
.3gp	H.263 H.264	HE-AAC	.cmb	H.264	HE-AAC	.mov	H.263 H.264 MPEG4	MP3 HE-AAC PCM/G.711
.avi	H.263 H.264 MPEG4 Xvid	MP3 HE-AAC PCM/G.711	.flv	Soreson Spark	MP3	.wmv	MPEG4 SP	WMA
			.mp4	H.263 H.264 MPEG4	MP3 HE-AAC	.asf	VC-1 (WMV9)	
						.ts	MPEG2	MP3




<Note>  
• To copy video files, the video file size must not exceed 4G and the video file being copied is from a computer or an SD card with FAT32 format.  
• Video format does not support content with B-Frame function.



## Playing Music from the Internal Memory, MicroSD Card, or External Source


If an external source (USB) is inserted, the external memory is read first. If you want to read data from the microSD card or internal memory, press **<** in the appropriate screen to change the data source. See steps below.

### 1. Select "Music"


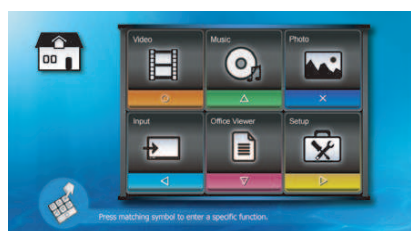


### 2. Select Data Source



The screen, the source icon on the button guide, and the sequence in which screens appear vary depending on the available data source. If the external source or microSD card is not inserted, its screen is skipped when **<** is pressed and the source icon on the button guide is not shown.

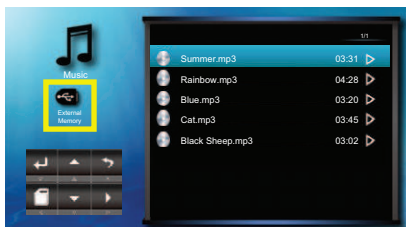


Change data source

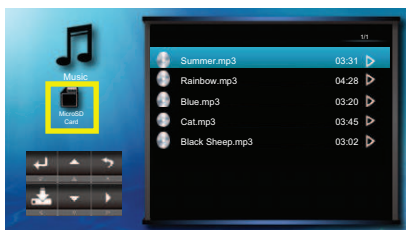



Change data source

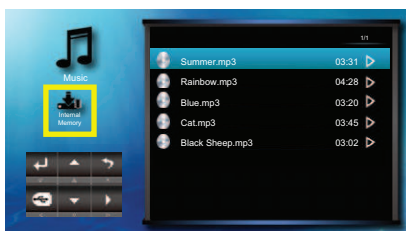


Change data source





### 3. Select Music File

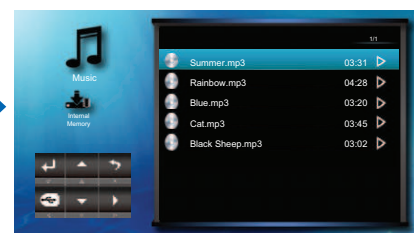

**<Note>**  
The displayed screen may vary depending on the selected data source on the previous step.



### 4. Playback File



Music Playback mode (see page 10)



# HOW TO PLAY MUSIC - PLAYBACK MODE

<Note>  
The button guide disappears when the keypad is not used for 3 seconds.  
To display the button guide, press any key except x or □.




Adjust volume		Back to previous screen	
Pause/Play		Return to Home menu	
Next track		Fast forward (press and hold)	
Previous track		Rewind (press and hold)	

Repeat / Shuffle Icons	
	Repeat all
	Repeat one
	Repeat off
	Shuffle on
	Shuffle off


<Note>  
To change repeat or shuffle settings, see Music Settings below.

# MUSIC SETTINGS

## 1. Select "Setup"



## 2. Select "Music Setting"



## 3. Adjust Settings



	Repeat all
	Repeat one
	Repeat off
	Shuffle on
	Shuffle off

# COMPATIBILITY: MUSIC

## Compatible Audio Format

File Format	Audio Decoder
.aac	HE-AAC
.asf	WMA9
.flac	FLAC
.mp3	MP3
.ogg	Vorbis
.ra	RA 6, 9, 10
.wma	WMA9
.wav	PCM

## Viewing Photos from the Internal Memory, MicroSD Card, or External Source


If an external source (USB) is inserted, the external memory is read first. If you want to read data from the microSD card or internal memory, press **◀** in the appropriate screen to change the data source. See steps below.

### 1. Select "Photo"





### 2. Select Data Source



The screen, the source icon on the button guide, and the sequence in which screens appear vary depending on the available data source. If the external source or microSD card is not inserted, its screen is skipped when **◀** is pressed and the source icon on the button guide is not shown.

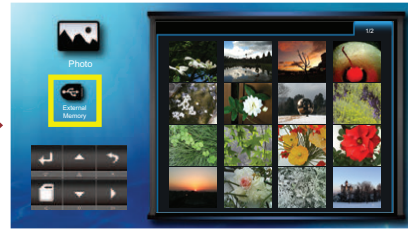


Change data source

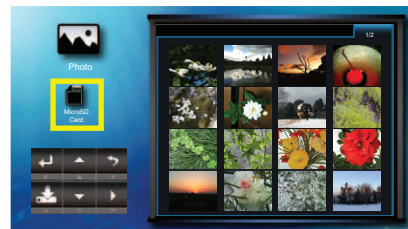

Change data source

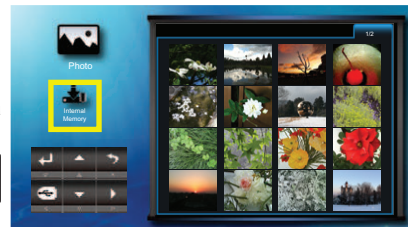


Change data source



### 3. Select Page




Page indicator

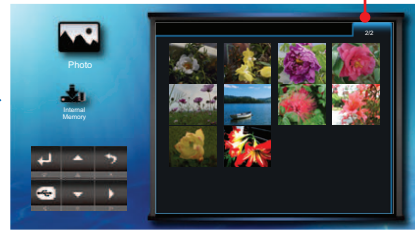

<Note>


The displayed screen may vary depending on the selected data source on the previous step.

### 4. Enter Current Page




### 6. Preview File

Full Screen mode (see page 12)

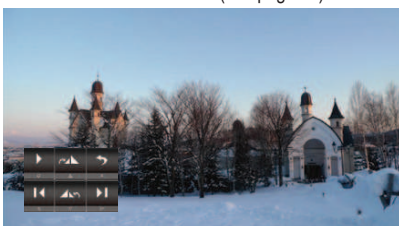


### 5. Browse Thumbnails



# HOW TO VIEW PHOTOS - FULL SCREEN MODE

<Note>  
The button guide disappears when the keypad is not used for 3 seconds.  
To display the button guide, press any key except x or o.

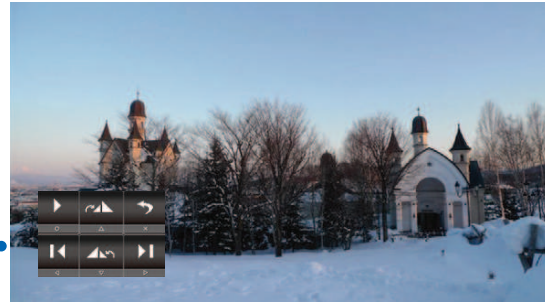

Play slideshow		Rotate 90° clockwise	
Next photo		Rotate 90° counter-clockwise	
Previous photo		Return to Home menu	



# HOW TO VIEW PHOTOS - SLIDESHOW MODE

In Slideshow mode, photos are played continuously at a specified interval time while playing music stored in the internal memory as background.

<Note>  
To change slideshow interval settings and enable/disable background music, see Slideshow Settings below.


## 1. Enter Slideshow Mode

Full screen mode

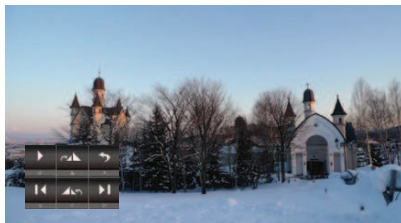


## 2. View Slideshow

Slideshow mode



## 3. Exit Slideshow Mode

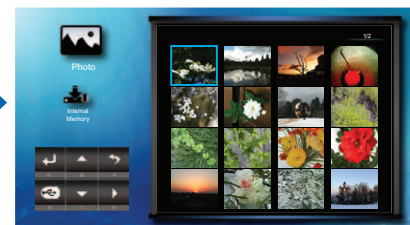


<Note>


- Make sure that background music setting is "On" to enable this feature.
- Save the music files (\*.mp3 format) under the "Slideshow Music" folder in the internal memory.
- Only music files stored in the internal memory "Slideshow Music" folder can be played as background music.

Pause/Play slideshow		Volume up	
Next photo		Volume down	
Previous photo		Return to Home menu	
Exit slideshow			

## 1. Select "Setup"



## 2. Select "Slideshow"



## 3. Adjust Settings



Timer: 2-second interval

Timer: 5-second interval

Timer: 10-second interval

Background music on

Background music off

# COMPATIBILITY: PHOTO

## Compatible Photo Format

File Format	File Extension
BMP	*.bmp,
JPG	*.jpg
JPEG	*.jpeg

<Note>  
The projector supports the following photo resolution:  
 • Bitmap file up to 2M (megapixels) each  
 • Jpeg file up to 10M (megapixels) each  
 If a photo resolution is over these limitations, the file will not be shown in the file directory screen.


<Note>  
For optimum display performance of static photos or slide show playback, it is recommended to use smaller file size and lower resolution photos.

# How to View Documents - SOURCE: INTERNAL MEMORY / USB FLASH DRIVE / MICROSD CARD / EXTERNAL SOURCE

## Viewing Documents from the Internal Memory, MicroSD Card, or External Source





If an external source (USB) is inserted, the external memory is read first. If you want to read data from the microSD card or internal memory, press **<** in the appropriate screen to change the data source. See steps below.

### 1. Select "Office Viewer"



### 2. Select Data Source


The screen, the source icon on the button guide, and the sequence in which screens appear vary depending on the available data source. If the external source or microSD card is not inserted, its screen is skipped when **<** is pressed and the source icon on the button guide is not shown.

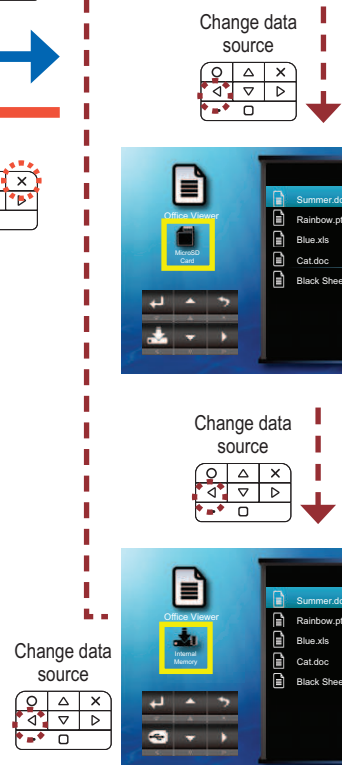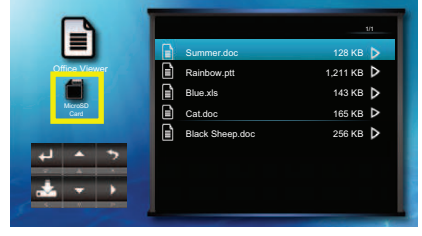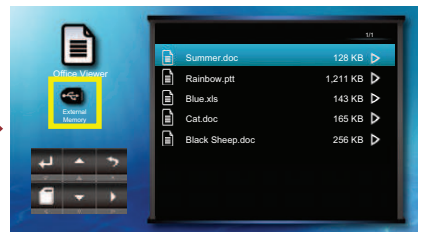


### 3. Select File



**<Note>**  
The displayed screen may vary depending on the selected data source on the previous step.

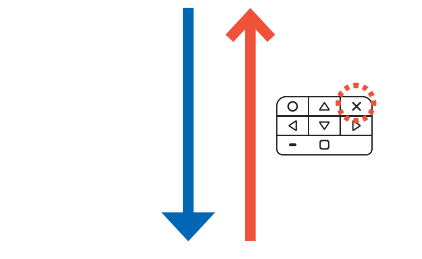

### 4. View File

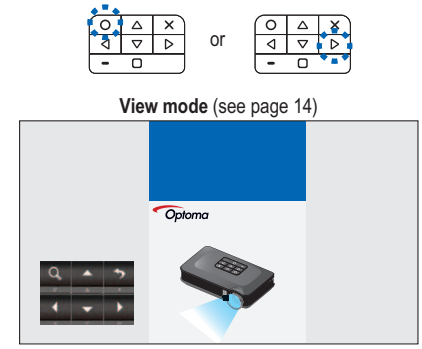

## COMPATIBILITY: DOCUMENT

The projector uses Pícel File Viewer to open and view Microsoft® Word files and Adobe® PDF files.

### Supported Versions

Version
Microsoft® Office 95
Microsoft® Office 97
Microsoft® Office 2000
Microsoft® Office 2003
Microsoft® Office 2007
Microsoft® Office 2010
Adobe® PDF 1.0 ~ 1.4

### Compatible Document Format

File Format	File Extension
Microsoft® Office Application (Word, Excel, Power Point)	.doc .xls .docx .xlsx .ppt .pptx
Adobe® PDF	.pdf

### Font / Language Support

The projector has limited font support. When a document with unsupported font is opened, Office Viewer automatically substitutes the unsupported font with default system fonts. This may cause the document



layout to look different. The projector supports one default font for each of the following languages.

**<Note>**  
• Office Viewer supports embedded fonts in Adobe® PDF documents but not in Microsoft® Word documents.  
• Embedded fonts are used in priority over the projector system fonts.

Font / Language	
Czech	French
Danish	German
Dutch	Hungarian
English	Italian

Japanese	Bulgarian
Korean	Croatian
Polish	Estonian
Iberian Portuguese	Finnish
Russian	Greek
Spanish	Slovenian
Swedish	Serbian
Thai	Latvian
Turkish	Lithuanian
Vietnamese	Macedonian
Traditional Chinese	Norwegian
Simplified Chinese	Romanian
Arabic	Latin American (Español)
Albanian	Slovakian
Brazilian Portuguese	Indonesian

# HOW TO VIEW DOCUMENTS - VIEW MODE

<Note>


The button guide disappears when the keypad is not used for 3 seconds. To display the button guide, press any key except X or O.




Zoom in 1x ~ 4x		Move left	
Page up		Move right	
Page down		Exit View mode	
Pan up, down, left, right (in zoom mode)		Return to Home menu	

# DISPLAY SETTINGS

## 1. Select "Setup"



## 2. Select "Display Setting"




## 3. Adjust Settings




	LED Mode: Movie (available only when the power adapter is plugged)		Gamma: Bright
	LED Mode: Bright (available only when the power adapter is plugged)		Gamma: Movie
	LED Mode: Standard		Aspect Ratio: Auto
	LED Mode: ECO		Aspect Ratio: 4:3
	Color Mode: Extended		Aspect Ratio: 16:9
	Color Mode: Standard		Projection: Front Desktop
	Gamma: Standard		Projection: Front Inverted
	Gamma: Presentation		Projection: Rear Desktop
			Projection: Rear Inverted

# SELECT MENU LANGUAGE

## 1. Select "Setup"




## 2. Select "System"




## 3. Select "Language"




## 5. Confirm language / Return to Home menu



## 4. Select Language




Select your preferred menu language.  
Options are: English, French, Spanish, Portuguese (Brazilian), German, Italian, Russian, Polish, Dutch, Swedish, Greek, Traditional Chinese, Simplified Chinese, Korean, Japanese

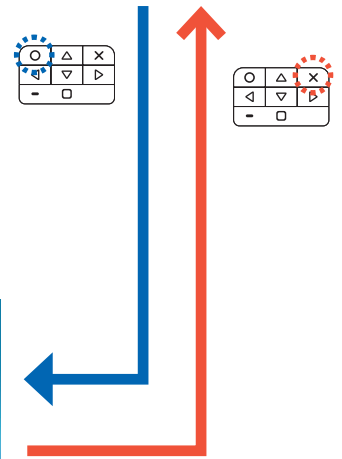


# VIEW PROJECTOR INFORMATION

## 1. Select "Setup"




## 2. Select "System"




## 3. Select "Information"



## 5. Return to Home Menu



## 4. View Information

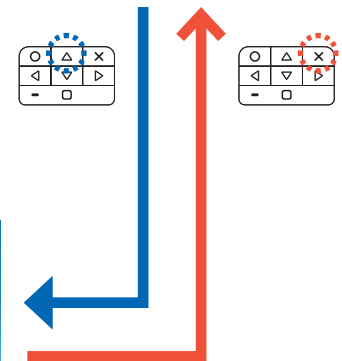

- MicroSD card capacity
- Internal memory capacity
- External memory (USB) capacity
- Battery charging
- Power adapter connected



# UPGRADE FIRMWARE



Software updates can be obtained from the OPTOMA website ([www.optoma.com](http://www.optoma.com) / [www.optoma.eu](http://www.optoma.eu) / [www.optoma.com.tw](http://www.optoma.com.tw)).

1. On your computer, create a folder named "upgrade".
2. Download the latest firmware from [www.optoma.com](http://www.optoma.com) and save it in the "upgrade" folder.
3. Copy the "upgrade" folder to the root folder of the microSD card.
4. Insert the microSD card into the microSD card slot of the projector.
5. Follow the steps below.

## 1. Select "Setup"



## 2. Select "System"

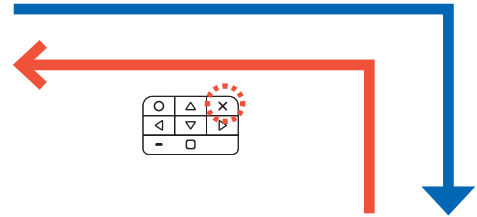


## 5. Wait to Complete




Upgrade may take a while to complete, do not touch any keys

## 4. Confirm Upgrade

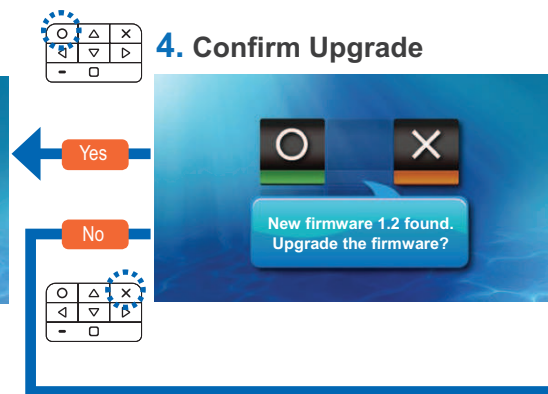


## 3. Select "Firmware Update"

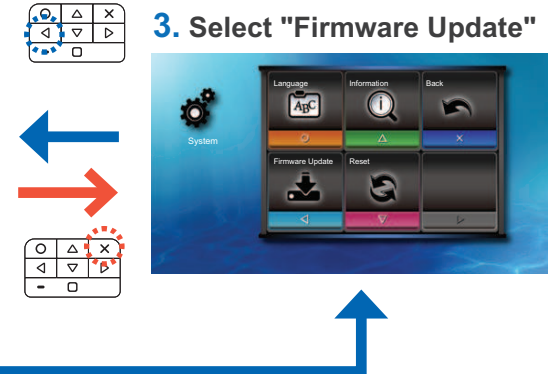

## 6. Turn Off the Projector

When the screen below appears, update is complete. Press and hold the Power button for 6 seconds to turn off the projector

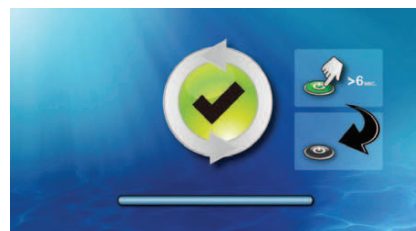

<Note>  
A "No new firmware is found" message appears if there is no update file in the microSD card.

<Note>

- Do not touch any buttons or turn off the projector while upgrading is in progress. Otherwise, this may damage the projector.
- Do not remove the microSD card until the upgrade is complete.

## 7. Remove the MicroSD Card

## 8. Turn On the Projector



# RESET THE SYSTEM



## Resetting the System by Reset Menu

<Note>  
When the system is reset, all files stored in the internal memory will be deleted. Ensure all files are backed up before resetting.


### 1. Select "Setup"




### 2. Select "System"



### 3. Select "Reset"



### 4. Confirm Reset

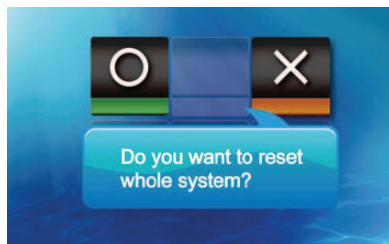

Reboot the projector




# HOW TO USE EXTERNAL INPUT SOURCE: VGA / COMPOSITE AV / HDMI



## Selecting Input Source

When the projector is not in playing mode nor reading from an external source, the projector automatically detects once a video source device is connected and turned on. A message appears on screen.

<Note>  
When multiple input source devices are connected at the same time, the last connected device will be detected.

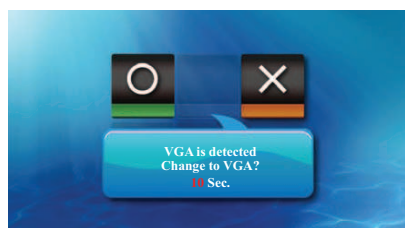


<Note>  
Similar message appears when other external input sources are detected.

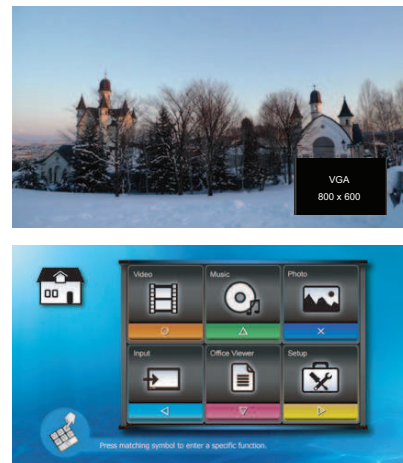


## Selecting Input Source Manually

If more than one external device is connected to the projector or the projector cannot automatically detect the external device, you have to manually select the input source. To do this, perform the following steps.

### 1. Select "Input"

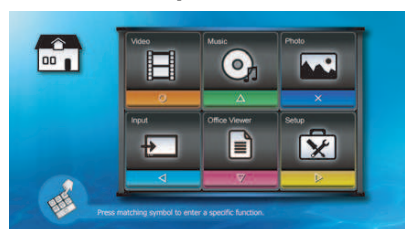

### 2. Select Input Source

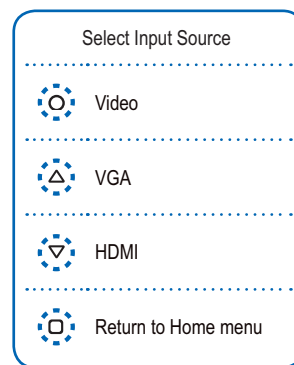

### 3. Enter Display Mode


Display mode



or





### 5. Exit Display Mode

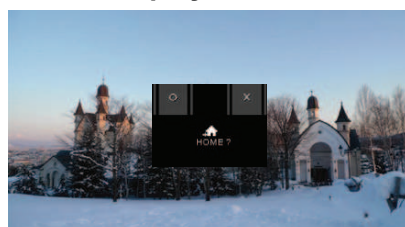

### 4. Adjust Volume / Settings View Source Content

To exit display mode

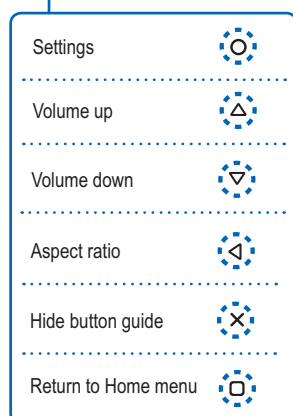


<Note>  
The signal message box briefly appears on screen; its label varies depending on the selected input signal.


# INPUT SOURCE SETTINGS

## Changing Aspect Ratio Settings


### 1. View Source Content




### 2. Select "Aspect Ratio"







### 3. Scroll Aspect Ratio Setting



### 4. Confirm Setting




<Note>  
When no key is pressed within 10 seconds, the aspect ratio icon automatically disappears and its setting is applied.

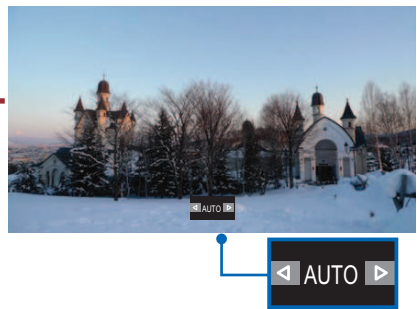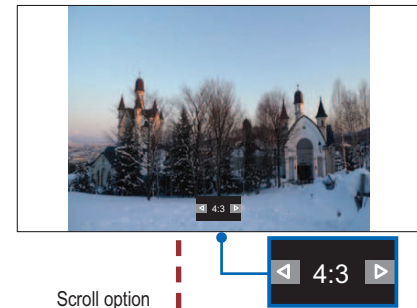


## Adjusting Contrast Settings



### 1. View Source Content





### 2. Select "Settings"



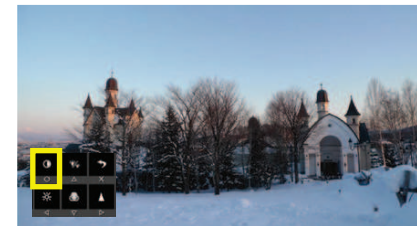


### 3. Select "Contrast"

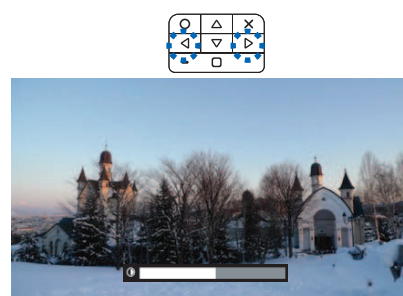

### 4. Adjust Setting



- Exit contrast settings 
- Scroll other settings: Sharpness, Color, LED, Brightness 
- Return to Home menu 

<Note>  
When no key is pressed within 10 seconds, the contrast icon automatically disappears and its setting is applied.

# INPUT SOURCE SETTINGS



## Adjusting Brightness Settings

### 1. View Source Content


Display mode




Display button guide




### 2. Select "Settings"



### 3. Select "Brightness"



### 4. Adjust Setting



Exit brightness settings	
Scroll other settings: Contrast, Sharpness, Color Mode, LED Mode, Brightness	
Return to Home menu	

<Note>  
When no key is pressed within 10 seconds, the brightness icon automatically disappears and its setting is applied.



## Selecting LED Mode Settings

### 1. View Source Content


Display mode




Display button guide





### 2. Select "Settings"



### 3. Select "LED Mode"



### 4. Adjust Setting

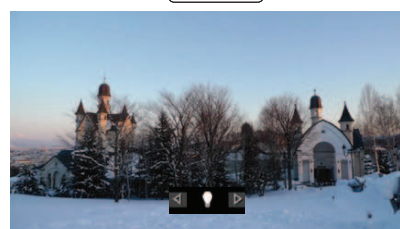

Exit LED mode settings	
Scroll other settings: Brightness, Contrast, Sharpness, Color Mode, LED Mode	
Return to Home menu	


<Note>  
When no key is pressed within 10 seconds, the LED mode icon automatically disappears and its setting is applied.

LED Mode settings	
Movie	ECO
Bright	Standard

# INPUT SOURCE SETTINGS

## Selecting Color Mode Settings

### 1. View Source Content




### 2. Select "Settings"



### 3. Select "Color Mode"



### 4. Adjust Setting

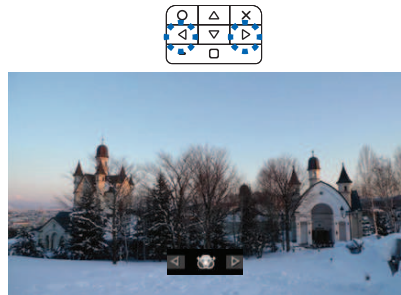

Exit color mode settings

Scroll other settings: LED Mode, Brightness, Contrast, Sharpness, Color, LED

Return to Home menu


<Note>  
When no key is pressed within 10 seconds, the color mode icon automatically disappears and its setting is applied.

Color Mode settings

- Extended: Use to project more vibrant colored pictures
- Standard: Use to project standard colored pictures

## Adjusting Sharpness Settings

### 1. View Source Content




### 2. Select "Settings"



### 3. Select "Sharpness"



### 4. Adjust Setting

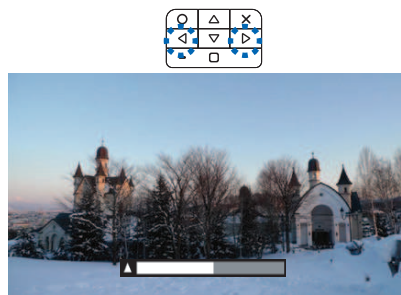

Exit sharpness setting mode

Scroll other settings: Color Mode, LED Mode, Brightness, Contrast, Sharpness

Return to Home menu



<Note>  
When no key is pressed within 10 seconds, the sharpness icon automatically disappears and its setting is applied.

# HOW TO UPLOAD FILES TO INTERNAL MEMORY

When a computer is connected via USB, the projector automatically detects the connection and the message below appears on screen.

<Note>  
Files can be transferred to the internal memory or microSD card if installed.

## 1. Confirm Transfer

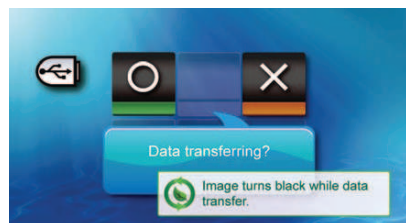

Returns to the previous screen

<Note>  
Displayed screen varies depending on the last session.

## 2. Upload Files by Computer



or



<Note>  
The screen turns black after 60 seconds for power saving. Press  $\square$  to wake up the display.

## 3. Unplug the USB Cable



<Note>  
Check your computer for the upload status. When upload is complete, you must unplug the USB cable to display the Home menu.

# COMPATIBLE VIDEO / VGA MODE

Timing Table

Mode	Resolution	V-Sync (Hz)
VGA	640x480	60
	800x600	60
	1024x768	60
	1280x720	60
	1280x800	60
	1024x600	60
Composite* Component HDMI	480i / 480P	60
	576i / 576P	50
	720p	50 / 60
	1080i	50 / 60

<Note>  
Video format does not support content with B-Frame function.

# TROUBLESHOOTING

If you experience a problem with your projector, please refer to the following information. If a problem persists, please contact your local retailer or service center.

### Image Problems

- ?** No image appears on-screen
  - Ensure the cables/charger/battery are correctly and securely connected.
  - Ensure the pins of connectors are not crooked or broken.
  - Make sure the projector is switched on.
- ?** Image is out of focus
  - Adjust the Focus Dial.
  - Make sure the projection screen is between the required distance 9.6 to 150 inches (0.245 to 3.810 meters) from the projector. See page 5.
- ?** Image is too small or too large
  - Move the projector closer to or further from the screen.
- ?** Image is reversed
  - Select "Setup --> Display --> Projection" from the OSD and set the projection direction.

### Audio Problems

- ?** No sound
  - During video or music playback, press  $\Delta$  or  $\nabla$  to adjust the volume.

### Battery Problems

- ?** Battery capacity is low
  - Remove the battery and clean the connectors.
  - The battery is worn out and needs to be replaced.
  - The battery may not charge correctly after the projector is turned off due to the high temperature emitted by the projector. Let the projector cool for a while before connecting the charger.

### LED Indicator

LED Color	Description
No light	In operation
Red	Battery is charging
Green	Battery is fully charged

## MEDIA FILE SPECS: DEFINITIONS

Term	Description
LBR	Low bit rate
SP	Simple Profile
ASP	Advanced Simple Profile
MP	Main Profile
ML	Main Level in MPEG2 or Medium Level in VC-1
BP	Baseline Profile

## MEDIA FILE SPECS: VIDEO CONTAINERS

### Video Containers

Container	Video Decoder	Audio or Speech Decoder
.3gp	H.263 H.264	HE-AAC
.avi	H.263 H.264 MPEG4 Xvid	MP3 HE-AAC PCM/G.711
.cmb	H.264	HE-AAC
.flv	Soreson Spark	MP3

Container	Video Decoder	Audio or Speech Decoder
.mp4	H.263 H.264 MPEG4	MP3 HE-AAC
.mov	H.263 H.264 MPEG4	MP3 HE-AAC PCM/G.711
.wmv .asf	MPEG4 SP VC-1 (WMV9)	WMA

## MEDIA FILE SPECS: AUDIO / IMAGE CONTAINERS

### Audio Containers

Container	Audio Decoder
.aac	HE-AAC
.asf	WMA9
.flac	FLAC
.mp3	MP3
.ogg	Vorbis
.ra	RA 6, 9, 10
.wma	WMA9
.wav	PCM

### Image Containers

Container	Image Decoder
BMP	*.bmp,
JPG	*.jpg
JPEG	*.jpeg

## MEDIA FILE SPECS: DECODERS

### Audio and Speech Decoders

Audio or Speech Decoder	Layer, Version, or Mono/Stereo	Sampling Frequency	Maximum Bitrate	Compliance/Specification
FLAC	stereo	96KHz, 24 bits per sampling	2.652Mbps	<a href="http://flac.sourceforge.net">http://flac.sourceforge.net</a>
HE-AAC	v1	48KHz	256kbps	ISO/IEC 14496-3
MP3	MPEG-1 layer 1, 2, and 3 Audio	48KHz	320kbps	ISO/IEC 11172-3 for fully compliant audio decoder and ISO/IEC 11172-4 for a Full Layer 3 decoder
PCM	-	48KHz	2304kbps	ITU-T G.711
Vorbis	FLAC	48KHz	500kbps	<a href="http://xiph.org/vorbis/doc/Vorbis_I_spec.html">http://xiph.org/vorbis/doc/Vorbis_I_spec.html</a>
WMA8 WMA9	L1-3	48KHz	385kbps	Windows Media Audio Standard Decoder Specifications

### Video Decoders

Video Decoder	Profile, Level	Maximum Resolution & fps	Maximum Bitrate	Compliance/Specification
H.263	BP, L10 (Short Header Mode)	D1, 30fps	4Mbps	MPEG-4 Part 2
H.264	BP, L3	D1, 30fps	4Mbps	ISO/IEC 14496-2:2004
MPEG2	MP@ML	1280x720, 30fps	6Mbps	ISO/IEC 13818-2
MPEG4	ASP SP	D1, 30fps	4Mbps	ISO/IEC 14496-2:2004
Sorensen Spark	-	800x600, 30fps	4Mbps	H.263 variant
VC-1	SP@ML MP@ML	800x600, 30fps	2.6Mbps	SMPTE 421M
Xvid	-	D1, 30fps	4Mbps	MPEG-4 Part 2

### Image Decoders

Image Decoder	Layer, Version	Maximum Megapixels	Compliance/Specification
JPEG	Baseline, non-interleave	12mp	ISO/DIS 10918-1



Clause for Office / Document Viewer

The copyright is owned by Pícsel to avoid rights violated by end customer and third parties.

1. All IPR, including but not limited to copyright, in the Pícsel Products is owned by Pícsel or its supplier.
2. The End User may not:
  - make copies of the Pícsel Products or make them available for use by third parties.
  - reverse engineer, disassemble, reverse translate, or in any way decode the Pícsel Products or any copy or part of it in order to derive any source code, save only as is permitted by any applicable law.
3. Pícsel makes no representations or warranties whether express or implied (by statute or otherwise) relating to the performance, quality, merchantability, or fitness for a particular purpose of the Pícsel Products or otherwise and all such representations or warranties are specifically disclaimed and excluded.
4. Pícsel agrees and acknowledges that Pícsel and the Pícsel Products will not be specifically mentioned in the end user license agreement.

Copyright © Optoma Company Limited.  
All rights reserved.

Optoma reserves the right to make technical changes. Optoma assumes no liability for damages incurred directly or indirectly from errors, omissions, or discrepancies between the device and this documentation.

Other brands or logos are trademarks or registered trademarks of their respective companies.

This device is not intended for use in the direct field of view at visual display workplaces.

